



产品选型手册

PRODUCT SELECTION GUIDE



地址: 温州市龙湾滨海明珠路687号
Add: 687 Binhai Mingzhu Road, Longwan, Wenzhou
电话: 0577-8869 8961 / 8869 8962 / 8869 8963
传真: 0577-86625729
邮箱: 13738313860@139.com
网址: www.jichuanfm.com
QQ: 621027006




企业官网



阿里商城

YOU NEED BODY
WHOLE-HEARTED SERVICE
体您所需·用心服务

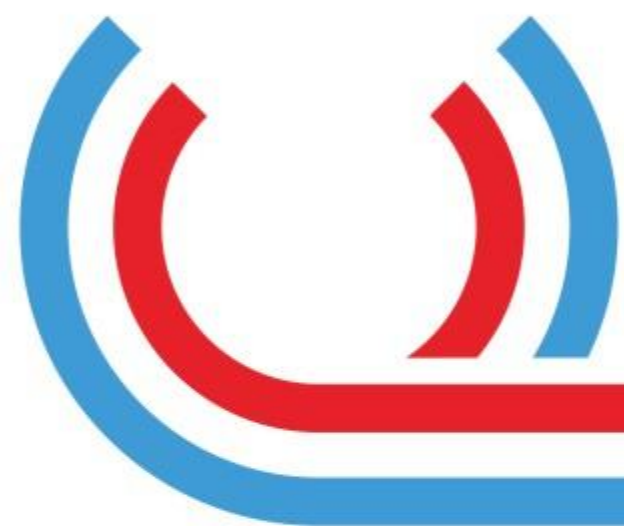

齐心协力，共获丰收。
团结凝聚力量，努力缔造辉煌。

Work together to achieve a bountiful harvest.
Unite and gather strength
strive to create brilliance.

温州吉川阀门科技有限公司创建于2010年，是一家集阀门研发、制造、销售服务于一体的制造型企业。经过十余年的艰苦奋斗、务实拼搏、开拓创新，企业实现了飞速、持续、健康发展。

企业拥有高精度数控加工中心，工艺严谨。同时采用先进的生产管理模式，产品严格按照ISO9001质量标准生产，建立了完善的质量管控体系及检验检测机制。为成品提供了强有力的品质保证。年生产能力达到1500余万元。

主导产品：丝扣球阀系列，丝扣闸截止系列，法兰球阀系列，高平台球阀系列，法兰闸截止阀系列、气电动阀门系列及工程配套系列。

主体材质: 304、316、316L、WCB及特材定制，
公称通径: DN10mm~600mm及1/2"~24"，
工作压力: 0.25MPa~10.0MPa/150Lb~900Lb/10K~20K，
工作温度: -196℃~816℃，
采用标准: GB、DIN、API、ANSI、JIS、BS等，
驱动方式: 手动、蜗轮、气动、电动、液动等。

产品在严格的质量控制下设计和制造，其规定的结构尺寸完全符合工艺技术及图纸标准要求，产品按规格型号可以进行互换。产品试压，材质光谱检测，层层把关，不良品绝不出厂。企业主要资质有：营业执照、ISO三体系认证、CE认证、工程产品推荐单位及多家国企民企战略合作供应商等。企业产品畅销全球多个国家及地区，如东南亚，美国，日本，韩国，欧洲等。产品广泛应用于电力、石油、化工、医药、冶金、食品、造纸、天然气及城建给排水等领域。并获得广大用户的认可和好评。

吉川阀门以其高质量的产品和良好的售后服务，不断创新，努力进取，与时俱进！我们将坚持走‘国际化、科技化、产业化、规模化’发展目标。大力引进先进设备、企业管理与技术服务人才，全力打造国内国际性阀门优质品牌。吉川阀门欢迎新老客户莅临参观考察，合作共赢，开创未来！

Founded in 2010, Wenzhou Jichuan Valve Technology Co., Ltd. is a manufacturing enterprise integrating valve R&D, manufacturing, sales and service. After more than ten years of hard work, pragmatic hard work, pioneering and innovative, the company has achieved rapid, sustained and healthy development.

The company has a high-precision CNC machining center with rigorous technology. At the same time, it adopts advanced production management mode, products are produced in strict accordance with ISO9001 quality standards, and a complete quality control system and inspection and testing mechanism have been established. Provides a strong quality assurance for the finished product. The annual production capacity reaches more than 15 million yuan.

Main products: threaded ball valve series, threaded gate stop series, flanged ball valve series, high platform ball valve series, flanged gate stop valve series, pneumatic electric valve series and engineering supporting series. Main body material: 304,316, 316L, WCB, and customized special materials. Nominal diameter: DN10mm-600mm and 1/2"-24". Working pressure: 0.25MPa-10.0MPa/150Lb-900Lb/10K-20K. Working temperature: -196°-816°. Adopt standards: GB, DIN, API, ANSI, JIS, BS, etc. Drive mode: manual, worm gear, pneumatic, electric, hydraulic, etc.

The products are designed and manufactured under strict quality control. The specified structural dimensions are in full compliance with the process technology and drawing standards, and the products can be interchanged according to specifications and models. Product pressure test, material spectrum inspection, check every layer, and defective products will never leave the factory. The main qualifications of the enterprise include: business license, ISO three system certification, CE certification, engineering product recommendation unit and a number of state-owned enterprises and private enterprises strategic cooperation suppliers, etc. Enterprise products sell well in many countries and regions around the world, such as Southeast Asia, the United States, Japan, Korea, Europe, etc. Products are widely used in electric power, petroleum, chemical, pharmaceutical, metallurgy, food, paper, natural gas and urban construction water supply and drainage fields. And has been recognized and praised by the majority of users.

With its high-quality products and good after-sales service, Jichuan Valve keeps innovating, working hard and advancing with the times! We will adhere to the development goal of internationalization, technology, industrialization, and scale'. Vigorously introduce advanced equipment, enterprise management and technical service personnel, and strive to build a domestic and international valve quality brand. Jichuan Valve welcomes new and old customers to visit and inspect, win-win cooperation and create the future!



COMPANY PROFILE

公司简介



COMPANY PROFILE

企业文化

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

APPLICATION AREA

应用领域

产品广泛应用于

石油、化工、天然气、轻工、电力、制药、印染、冶金、建筑工程、制冷、供水等领域。

Products are widely used in:
Petroleum, chemical, natural gas, light industry, power, pharmaceutical, printing and dyeing, metallurgy, construction, refrigeration, water supply and other fields.

核心价值观

Core values

专业，创新，诚信，共赢
Professional, innovative, honest and win-win

经营理念

management idea

追求卓越无止境、与时俱进创未来
Pursue excellence endlessly, advance with
the times and create the future

工作理念

Work concept

风雨同舟、荣辱与共
Come through thick and thin, share weal
and woe

企业精神

Enterprise spirit

齐心协力、大胆创新、感恩负责、勇于进取
Make concerted efforts, be bold in innovation, be
grateful and responsible, and be bold in making
progress



石油
OIL



化工
CHEMICAL



制药
PHARMACEUTICAL



天然气
NATURAL GAS



电力
ELECTRICITY



冶金
METALLURGY



MARKETING NETWORK

营销网络



产品广泛用于石油、造纸、水电、食品、医药、轻纺、冶炼、污水处理、矿厂、化工、高层建筑、给排水等工程，远销国内外各大、中、小城市，深受广大用户的信赖和好评。

在当前激烈的市场竞争中，本公司始终奉行“以科技为先导，以品质为保证，以诚信为准则，以服务为目标”的经营理念，坚持追求卓越，创造完美和富有创造性的价格。热烈欢迎新老客户前来洽谈业务，我们将与您携手合作，共同进步，共同发展，共创未来。

The products are widely used in petroleum, papermaking, hydropower, food, medicine, textile, smelting, sewage treatment, mining, chemical industry, high-rise buildings, water supply and drainage and other projects. User's trust and praise.

In the current fierce market competition, the company has always pursued the business philosophy of "taking science and technology as the guide, quality as the guarantee, integrity as the criterion, and service as the goal", insisting on the pursuit of excellence, creating perfect and creative prices. Warmly welcome new and old customers to come to negotiate business, we will work with you to make progress, develop together and create a better future.

阀门供应链服务商

VALVE SUPPLY CHAIN SERVICE PROVIDER

集阀门研发、制造、销售服务于一体

CONTENTS

目录



体你所需 用心服务

01

产品展示 Product Display

高/低平台法兰球阀系列(气电动) HIGH/LOW PLATFORM FLANGE BALL VALVE SERIES(PNEUMATIC AND ELECTRIC)	01-02
高平台丝扣球阀系列(气电动) HIGH-PLATFORM THREADED BALL VALVE SERIES(PNEUMATIC AND ELECTRIC)	03-04
丝扣球阀系列 SCREW THREAD BALL VALVE SERIES	05-06
丝扣闸截止阀门系列 SCREW THREAD GATE/GLOBE CHECK VALVE SERIES	07-08

02

丝扣产品参数 Screw thread product parameters

丝扣球阀系列 SCREW BALL VALVE SERIES	09-11
丝扣闸截止系列 THREADED GATE /GLOBE VALVE SERIES	12
立式止回阀 VERTICAL CHECK VALVE	13
Y型内螺纹过滤器 Y TYPE INTERNAL THREAD FILTER	13
一片式快装球阀 1PC QUICK-FIT BALL VALVE	14
两片式快装球阀 2PC QUICK-FIT BALL VALVE	14

03

法兰产品参数 Flange product parameters

二片式美标高平台法兰球阀 TWO PIECE AMERICAN STANDARD HIGH PLATFORM FLANGE BALL VALVE	15-16
二片式国标高平台法兰球阀 TWO PIECE NATIONAL STANDARD HIGH PLATFORM FLANGE BALL VALVE	17-18
二片式日标高平台法兰球阀 TWO-PIECE JAPANESE ELEVATION PLATFORM FLANGED BALL VALVE	19-20
二片式德标高平台法兰球阀 TWO PIECE GERMAN STANDARD FLANGED BALL VALVE	21-22
三片式高平台法兰球阀 THREE PIECE HIGH PLATFORM FLANGE BALL VALVE	23-24
高平台薄型球阀 HIGH PLATFORM THIN BALL VALVE	25
三通、四通高平台球阀 THREE-WAY, FOUR-WAY HIGH PLATFORM BALL VALVE	26
美标法兰闸阀 AMERICAN STANDARD FLANGE GATE VALVE	27
日标法兰闸阀 JAPANESE STANDARD FLANGE GATE VALVE	28
国标法兰闸阀 NATIONAL STANDARD FLANGE GATE VALVE	29
美标法兰截止阀 AMERICAN STANDARD FLANGE GLOBE VALVE	30
日标法兰截止阀 JAPANESE STANDARD FLANGE GLOBE VALVE	31
国标法兰截止阀 NATIONAL STANDARD FLANGE GLOBE VALVE	32
美标日标法兰旋启式止回阀 AMERICAN STANDARD JAPANESE STANDARD	33
国标法兰旋启式止回阀 NATIONAL STANDARD FLANGE SWING CHECK VALVE	34
法兰升降式止回阀 FLANGE LIFT CHECK VALVE	35
法兰过滤器 FLANGE FILTER	36
D343H蜗轮传动法兰式金属硬密封蝶阀 D343H WORM GEAR DRIVE FLANGED METAL HARD SEAL BUTTERFLY VALVE	37-38
D373H蜗轮传动对夹式金属硬密封蝶阀 D373H WORM GEAR DRIVE WAFER TYPE METAL HARD SEAL BUTTERFLY VALVE	39-40

HIGH/LOW PLATFORM FLANGE BALL VALVE SERIES (PNEUMATIC AND ELECTRIC) 高/低平台法兰球阀系列(气电动)



德标高平台法兰球阀
Flange ball valve of Degao platform



高平台法兰球阀
High platform flange ball valve



日标高平台法兰球阀
Flange ball valve of daily elevation platform



高平台三片式法兰球阀
High-platform three-piece flange ball valve



低平台法兰球阀
Low platform flange ball valve



对夹式高平台法兰球阀
Wafer type high platform flange ball valve



气动三片式法兰球阀
Pneumatic three-piece flange ball valve



碳钢三片式法兰球阀
Carbon steel three-piece flange ball valve

HIGH-PLATFORM THREADED BALL VALVE SERIES (PNEUMATIC AND ELECTRIC) 高平台丝扣球阀系列(气电动)



气动三片式螺纹球阀
Pneumatic 3-PC threaded ball valve



三片式丝扣高平台球阀
3-PC high platform ball valve



三片式高平台焊接球阀
Electric 3-PC threaded ball valve



2000WOG
三片式丝扣高压球阀
3-PC high-pressure ball valve



电动三片式丝扣球阀
Electric 3-PC threaded ball valve

SCREW THREAD BALL VALVE SERIES 丝扣球阀系列



 一片式球阀 1-PC ball valve					 二片式德标球阀 2-PC German standard ball valve	 二片式球阀 2-PC ball valve	 2000WOG 二片式带锁球阀 2-PC lock ball valve
					 二片式快装球阀 2-PC quick-fit ball valve	 二片式双外丝球阀 2-PC double outer thread ball valve	 二片式内外丝球阀 2-PC internal and external ball valve
 二片式球阀(3000WOG) Two-piece Ball Valve	 三片式丝扣球阀 3-PC threaded ball valve	 三片式快装球阀 3-PC quick-fit ball valve	 三通球阀 Three-way ball valve	 三片式加长杆焊接球阀 3-PC welding ball valve with extension rod			
 三片式焊接球阀 3-PC welded ball valve	 三片式焊接球阀 3-PC welded ball valve	 三片式真空球阀 Three-piece Vacuum Ball Valve	 三片式双外丝球阀 Three-piece Double Outer Wire Ball Valve	 三片式高平台球阀 Three-piece high platform ball valve			
 三片式高压球阀 Three-piece High Pressure Ball Valve	 放料球阀 Discharge Ball Valve	 卫生级快装球阀 Sanitary Quick Ball Valve	 碳钢二片式球阀 Carbon steel 2-PC ball valve	 碳钢三片式球阀 Carbon steel 3-PC ball valve			

SCREW THREAD GATE/GLOBE CHECK VALVE SERIES 丝扣闸截止阀门系列




		
丝扣闸阀 Threaded gate valve	丝扣双外丝闸阀 Threaded Double Outer Wire Gate Valve	丝扣截止阀 threaded globe valve
		
丝扣截止阀 Threaded Globe Valve	碳钢丝扣闸阀 Carbon steel wire buckle gate valve	碳钢丝扣截止阀 Carbon steel wire buckle stop valve
		
带滤网止回阀 Check Valve With Strainer		
		
卧式止回阀 Horizontal check valve	立式止回阀 Vertical check valve	丝扣止回阀 (硬密封) Threaded Check Valve (hard Seal)
		
		丝扣止回阀 (软密封) Threaded Check Valve (soft Seal)
		
Y型过滤器 Y-type filter	Y型止回阀 Y Type Check Valve	Y型过滤器 Y Type Filter
		
		对夹止回阀 Wafer check valve

SCREW BALL VALVE SERIES
丝扣球阀系列




Q11F-16P
64

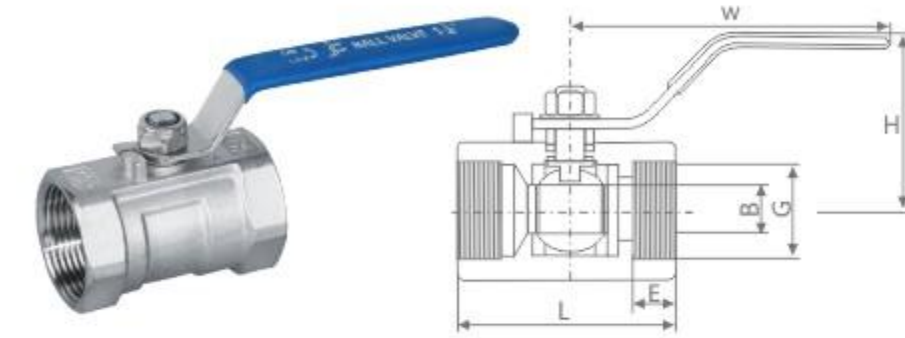

一片式球阀 1PC Ball valve

DN	G	B	L	E	H	A	WEGHT
8	1/4"	5	40	13	28	65	0.06
10	3/8"	9	45	13	28	65	0.08
15	1/2"	9.5	53	16	34	85	0.12
20	3/4"	12.5	56	18	40	95	0.19
25	1"	15	67.5	20	52	110	0.29
32	1 1/2"	20	75	21.5	62	140	0.45
40	1 1/4"	25	80	23	68	140	0.62
50	2"	32	93	24.5	75	155	0.98
65	2 1/2"	40	112	25	82	180	1.72


Q11F-16P
64

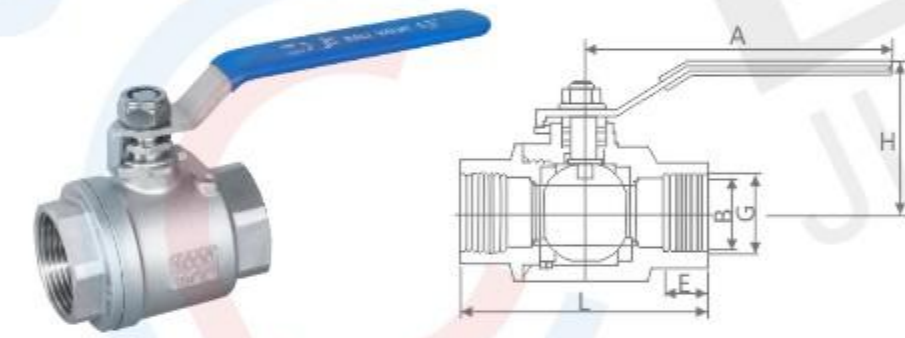

二片式球阀 2PC Ball valve

DN	G	B	L	E	H	A	WEGHT
6	1/4"	8	54	11.5	52	105	0.21
10	3/8"	10	54	1.5	52	105	0.2
15	1/2"	15	54	14	65	130	0.22
20	3/4"	20	64	15	70	130	0.33
25	1"	25	74	15	78	150	0.53
32	1 1/4"	32	83	18	82	180	0.83
40	1 1/2"	38	95	19	90	200	1.13
50	2"	50	105	19	98	200	1.45
65	2 1/2"	64	139	23	140	240	2.78
80	3"	-	165	-	-	-	4.42
100	4"	-	206	-	-	-	9.3

Q11F-16P
64

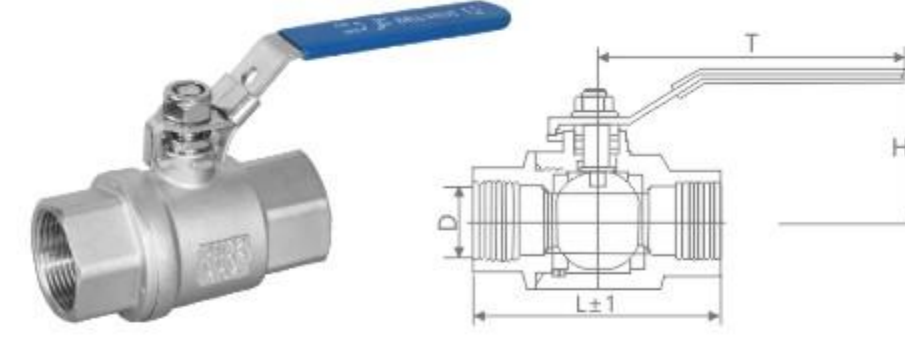

德标二片式球阀 German standard 2PC Ball valve


SIZE	DN	D	L	H	T	WEGHT
1/4"	8	12	55	51	92	0.206
3/8"	10	12	60	52	92	0.205
1/2"	15	15	75	60	104	0.272
3/4"	20	20	80	64	119	0.379
1"	25	25	90	68	123	0.57
1 1/4"	32	32	110	76	144	0.93
1 1/2"	40	40	120	84	158	1.32
2"	50	50	140	92	168	1.83
2 1/2"	65	65	185	135	243	4
3"	80	80	205	144	243	5.5
4"	100	100	240	166	295	8.5

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

SCREW BALL VALVE SERIES
丝扣球阀系列

Q11F-16P
64

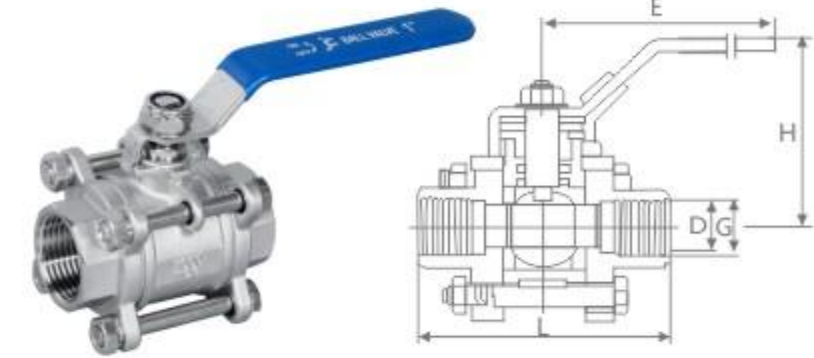

三片式丝扣球阀 3PC ThreadBall valve

DN	G	D	L	H	E	WEIGHT
6	1/4"	8	62	52	98	0.36
10	3/8"	10	62	52	98	0.34
15	1/2"	15	62	65	125	0.45
20	3/4"	20	72	70	125	0.56
25	1"	25	78	73	125	0.79
32	1 1/4"	32	99	82	145	1.33
40	1 1/2"	38	110	90	205	1.67
50	2"	50	127	98	205	2.3
65	2 1/2"	64	169	140	250	4.77
80	3"	76	216	135	265	6.85
100	4"	100	260	155	300	13


Q61F-16P
64



三片式对焊球阀 3PC Ball Welding Ball valve

DN	G	B	L	H	A	重量
6	1/4"	6	65	52	98	-
10	3/8"	10	65	52	98	-
15	1/2"	15	68	65	125	0.46
20	3/4"	20	81	70	125	0.58
25	1"	25	81	78	145	0.82
32	1 1/4"	32	99	82	145	1.37
40	2 1/2"	38	118	90	205	1.84
50	2"	50	136	98	205	2.36
65	2 1/2"	64	177	140	250	4.66
80	3"	76	193	135	265	-
100	4"	100	260	155	300	-

Q11F-16P
64

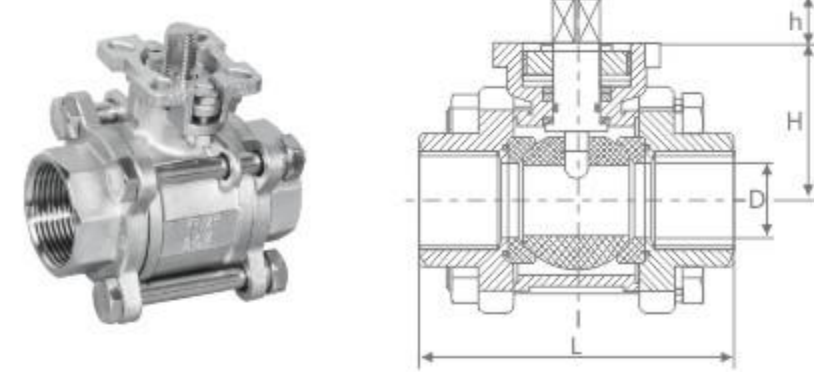

三片式高平台内螺纹球阀 3PC High Platform ThreadBall valve


DN	G	D	L	H	W	WEIGHT
6	1/4"	12.5	64	68.4	135	0.42
10	3/8"	12.5	64	68.4	135	0.4
15	1/2"	15	64	72	135	0.6
20	3/4"	20	77.5	78	135	0.79
25	1"	25	82	90	152	0.9
32	1 1/4"	32	98	95	152	1.36
40	1 1/2"	38	110	107	188	1.82
50	2"	50	126	122	188	2.38
65	2 1/2"	65	163	155	233	3.1
80	3"	76	191	164	233	5.42
100	4"	94	244	170	233	13.37

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

SCREW BALL VALVE SERIES
丝扣球阀系列




Q81F-(6-25)C,P,R

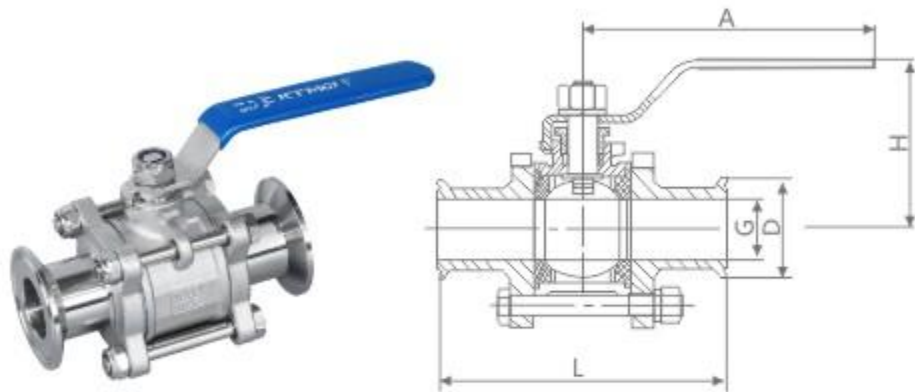

三片式快装球阀 3PC quick install ball valve

DN	G	D	L	H	A
15	1/2"	34	95	68	125
20	1/4"	50.5	105	70	125
25	1"	50.5	115	80	145
32	1 1/4"	50.5	125	84	145
40	1 1/2"	50.5	135	93	205
50	2"	64	150	100	205
65	2 1/2"	91	190	142	250
80	3"	106	220	155	250


Q15F-16P
64

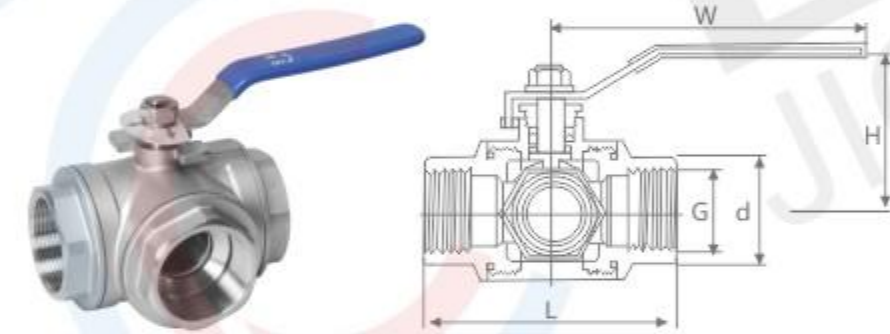

内螺纹三通球阀 Female three ball valve

DN	G	L	d	W	H	重量T型	重量L型
15	1/2"	70	12	95	59	0.44	0.45
20	3/4"	80	14	125	63	0.62	0.62
25	1"	86	18	125	68	0.85	0.87
32	1 1/4"	111	25	125	145	1.75	1.88
40	2 1/2"	132	32	145	89	2.82	2.96
50	2"	145	38	205	100	3.84	4

Q15F-16P
64

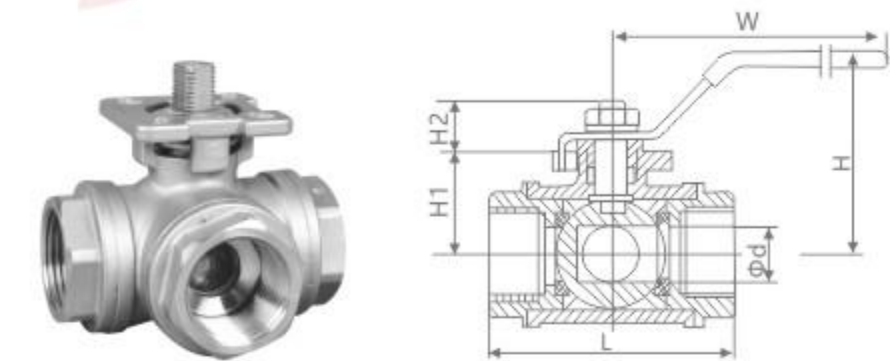

三通高平台内螺纹球阀 Three-way high platform internal thread ball valve


DN	d	L	H	H1	H2	W	ISO5211	重量T型	重量L型
1/2"	11	70	70	42	9	145	F03-F04	0.51	0.52
3/4"	15	80	77	49	9	145	F03-F05	0.67	0.68
1"	20	86	87	60	11	170	F04-F05	1	1.02
1 1/4"	25	111	93	63	11	170	F04-F07	1.77	1.9
1 1/2"	32	132	105	74	14	210	F05-F07	3.06	3.2
2"	40	145	113	83	14	210	F05-F07	4.12	4.28

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

THREADED GATE /GLOBE VALVE SERIES
丝扣闸截止系列

Z15W-16P
R

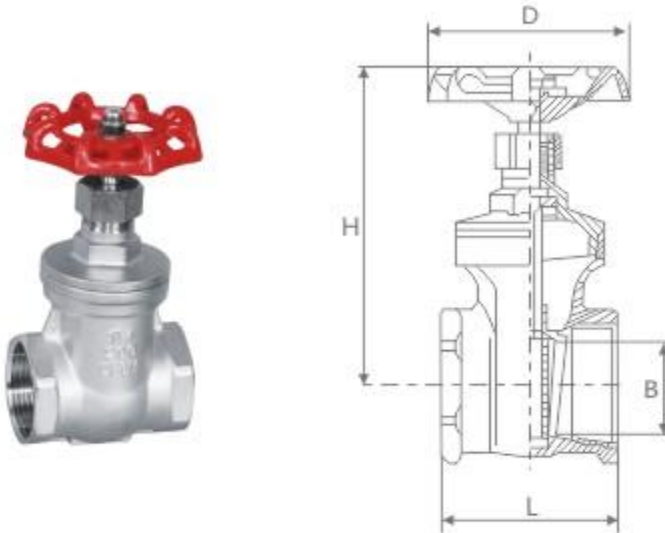


Z15W闸阀 Z15w Gate Valve

技术规范 Technique norm
公称压力: 1.6MPa
适合介质: 水、油、气
适合温度: 常温下1.6MPa饱和蒸汽下1.0MPa
压力实验符合ISO5208, 圆锥管螺纹符合ISO07标准中的Rc螺纹
Nominal pressure: 1.6MPa
Applicable medium: water, oil, steam
Applicable temperature: normal temperature bottom 1.6MPa stanrated fume bootom 1.0MPa
Pressure test matchISO5208, Lone tube the screw match ISO7 standard inside of Rc screw

SIZE	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
D	70	70	80	80	100	100	-	-	-
H	90	102	114	124	152.5	169.5	-	-	-
L	52	57	61	70	73	84	106	117	127
B	31	20	25	32	40	50	-	-	-
重量	0.37	0.43	0.54	0.83	1.17	1.68	3.2	4.18	6.62

J11W-16P
R

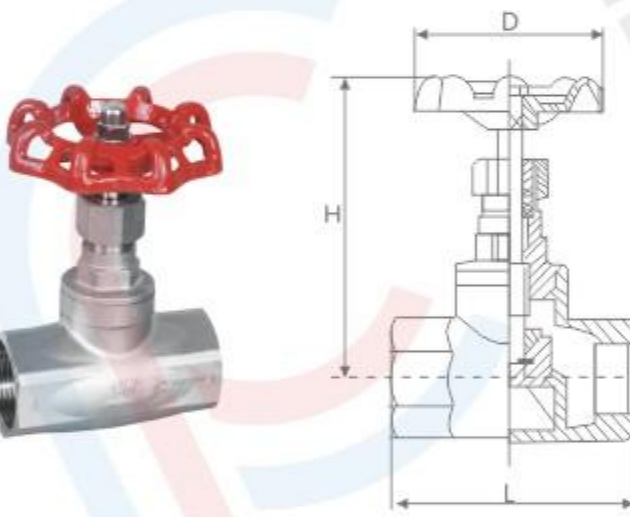


J11W截止阀 J11w Globe Valve

技术规范 Technique norm
公称压力: 1.6MPa
适合温度: t≤150°C
压力实验符合ISO5208
圆锥管螺纹符合ISO07标准中的Rc螺纹
Nominal pressure: 1.6MPa
Applicable temperature: t≤150°C
Pressure test match ISO5208
Lone tube the screw match ISO7 standard inside of Rc screw

DN	15	20	25	32	40	50	65	80
SIZE	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	-	-
L	59	66	79	89	103	117	165	189
H	90	98	108	120	146	162	-	-
D	70	70	80	90	100	120	-	-
WEIGHT	0.33	0.44	0.62	0.92	1.36	1.94	4.15	5.7

H14W-16P
R

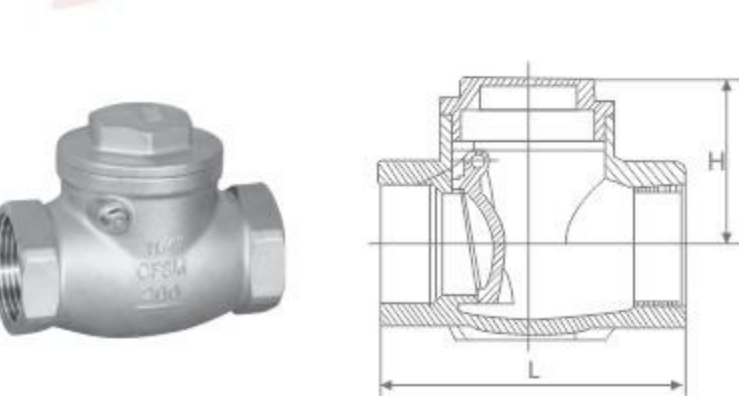


H141W止回阀 H14w Check Valve

技术规范 Technique norm
公称压力: 1.6MPa
适合介质: 水、油、气
适合温度: t≤150°C
压力实验符合ISO5208, 圆锥管螺纹符合ISO07标准中的Rc螺纹
Nominal pressure: 1.6MPa
Applicable medium: water,oil,steam
Applicable temperature:t≤150°C
Pressure test match ISO5208, Lone tube the screw match ISO07 standard inside of Rc screw

DN	8	10	15	20	25	32	40	50	65	80	100
SIZE	-	-	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	-	-	-
L	63	63	63	75	85	100	115	135	165	191	238
H	-	-	65	80	90	105	120	140	-	-	-
WEIGHT	0.25	0.23	0.22	0.31	0.43	0.68	0.92	1.34	2.6	3.9	7.38

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!


VERTICAL CHECK VALVE
立式止回阀

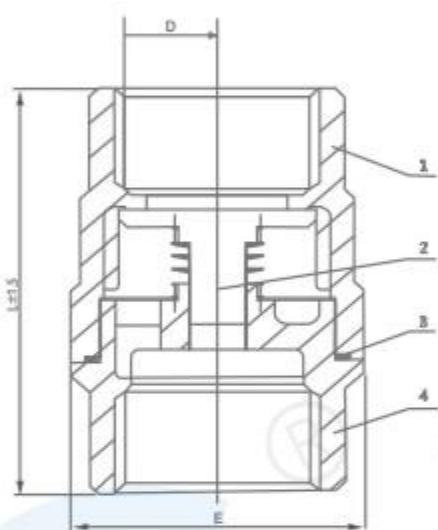

主要外形尺寸 Main Dimensions

SIZE	DN	D	E	L±1.5	Weight (kg)
1/4"	8	9	32	51	0.14
3/8"	10	11	32	51	0.12
1/2"	15	15	35	60	0.16
3/4"	20	20	41	68	0.22
1"	25	25	48	79	0.34
1 1/4"	32	32	57	86	0.5
1 1/2"	40	40	69	98	0.74
2"	50	50	81	118	1.1
2 1/2"	65	65	114	148	2.56
3"	80	80	139	160	3.74
4"	100	98	171	208	8.52

Y TYPE INTERNAL THREAD FILTER
Y型内螺纹过滤器

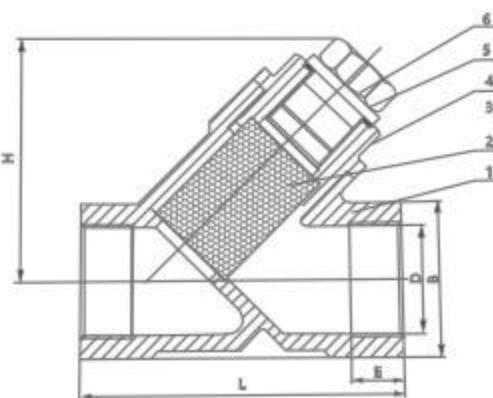

主要外形尺寸 Main Dimensions

SIZE	DN	D	L±1.5	H	Weight (kg)
1/4"	8	8	56	35	0.135
3/8"	10	10	56	35	0.120
1/2"	15	15	60	45	0.15
3/4"	20	20	74	60	0.26
1"	25	25	89	63	0.37
1 1/4"	32	32	97	80	0.53
1 1/2"	40	40	108	88	0.75
2"	50	50	127	109	1.26
2 1/2"	65	65	165	138	2.35
3"	80	80	188	153	3.85
4"	100	100	232	196	6.0

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!


YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

1PC QUICK-FIT BALL VALVE
一片式快装球阀



主要外形尺寸 Main Dimensions

DN	G	d	E	H	L
8	1/4"	5	59	39	39
10	3/8"	6.5	58	43	43
15	1/2"	8.5	52	35.25	53
20	3/4"	12	56	38.5	57
25	1"	15	70	46.5	67

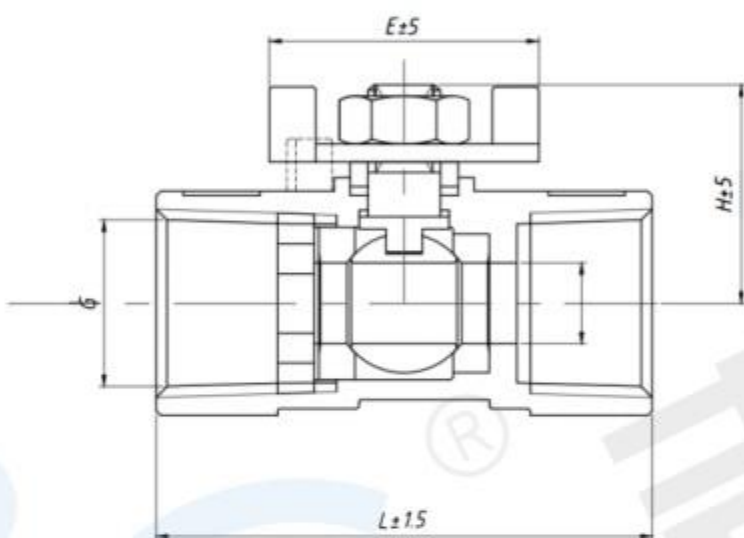


2PC QUICK-FIT BALL VALVE
两片式快装球阀



主要外形尺寸 Main Dimensions

DN	G	d	E	H	L
8	1/4"	12	57	43	39
10	3/8"	12	57	44	43
15	1/2"	15	52	38	53
20	3/4"	20	64	38.5	57
25	1"	25	70	46.5	68

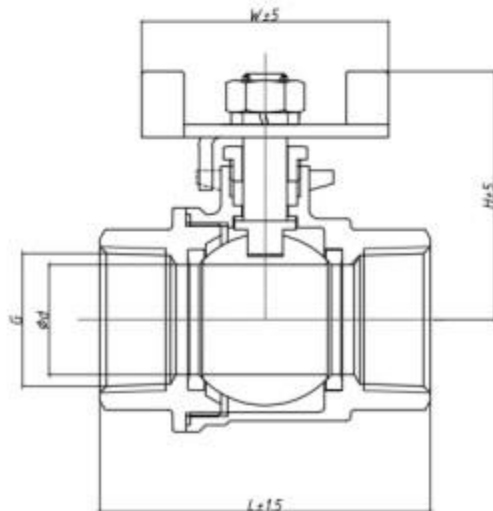



注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

TWO PIECE AMERICAN STANDARD HIGH PLATFORM FLANGE BALL VALVE
二片式美标高平台法兰球阀



特点 Features

- 全通径 Full port, 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: CLASS 150/300
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- 防静电装置 (可选) Anti-static device (option)
- 带锁手柄 Locking device handle
- ISO5211直装高平台设计 ISO 5211 Direct mounting pad
- API 607 防火结构 (可选) API 607 Fire safe (option)
- 自动化装置 (可选) Automation accessories (option)
- 设计标准 Design: ASME B16.34, API608, API6D
- 法兰标准 Flange dimension: ASME B16.5
- 结构长度 Face to face: ASME B16.10
- 检验 & 测试 Inspection & testing: API 598

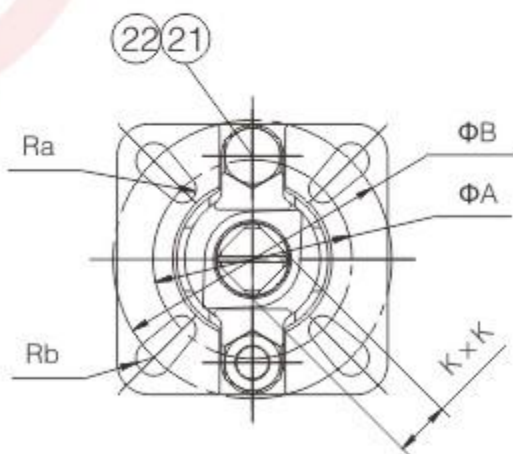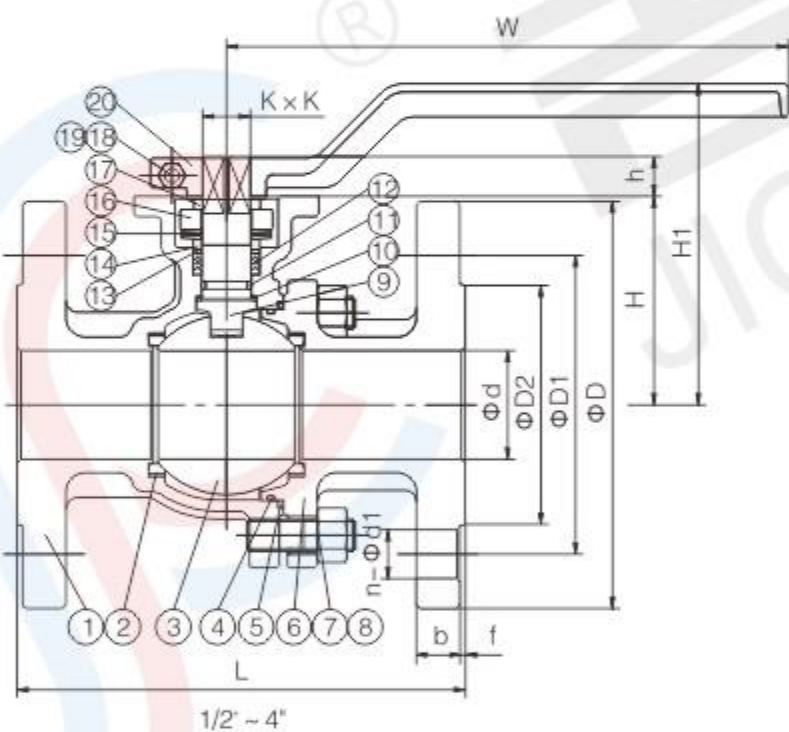

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB	CF8	CF8M
2	阀座 SEAT	PTFE		
3	球体 BALL	CF8	CF8	CF8M
4	O 形圈 O-RING	FPM		
5	垫片 GASKET	PTFE		
6	阀盖 BONNET	WCB	CF8	CF8M
7	螺栓 BOLT	304		
8	螺母 NUT	304		
9	阀杆 STEM	304	304	316
10	阀杆垫圈 STEM WASHER	PTFE+25% GF		
11	O 形圈 O-RING	FPM		
12	填料 PACKING	PTFE		
13	耐磨垫圈 WEAR WASHER	PTFE+25% GF		
14	填料盖 GLAND	304		
15	碟形弹簧 DISC SPRING	304		
16	压盖法兰 GLAND FLANGE	CF8		
17	STOPPER	304		
18	六角螺栓 HEX SOCKET BOLT	304		
19	螺母 NUT	304		
20	手柄 HANDLE	WCB/CF8		
21	螺栓 BOLT	304		
22	螺母 NUT	304		

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

TWO PIECE AMERICAN STANDARD HIGH PLATFORM FLANGE BALL VALVE
二片式美标高平台法兰球阀

尺寸 Dimensions CLASS 150

Unit: mm

公称直径 Nominal Diameter		L	d	D2	D1	D	b	f	n-φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15	1/2"	108	15	35	60.3	90	8	2	4-16	55	9	87	140	3.0	3.5	36	50	9X9
20	3/4"	117	20	43	69.9	100	8.9	2	4-16	60	9	92	140	3.0	3.5	36	50	9X9
25	1"	127	25	51	79.4	110	9.6	2	4-16	67	11	102	170	3.0	3.5	42	50	11X11
32	1-1/4"	140	32	63.5	88.9	115	11.2	2	4-16	76	11	111	170	3.0	3.5	42	50	11X11
40	1-1/2"	165	40	73	98.4	125	12.7	2	4-16	85	14	123	200	3.5	4.5	50	70	14X14
50	2"	178	50	92	120.7	150	14.3	2	4-19	93	14	131	200	3.5	4.5	50	70	14X14
65	2-1/2"	190	65	105	139.7	180	15.9	2	4-19	113	17	157	300	4.5	5.5	70	102	17X17
80	3"	203	80	127	152.4	190	17.5	2	4-19	126	17	170	300	4.5	5.5	70	102	17X17
100	4"	229	100	157	190.5	230	22.3	2	8-19	141	17	185	300	4.5	5.5	70	102	17X17
125	5"	356	125	185	216	255	22.3	2	8-22	170	25	255	650	5.5	6.5	102	125	22X22
150	6"	394	150	216	241.3	280	23.9	2	8-22	192	30	277	800	5.5	6.5	102	125	27X27
200	8"	457	200	270	298.5	345	27	2	8-22	234	35	280	300	5.5	6.5	102	125	27X27

尺寸 Dimensions CLASS 300

Unit: mm

公称直径 Nominal Diameter		L	d	D2	D1	D	b	f	n-φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15	1/2"	140	15	35	66.7	95	12.7	2	4-16	55	9	87	140	3.0	3.5	36	50	9X9
20	3/4"	152	20	43	82.6	115	14.3	2	4-19	60	9	92	140	3.0	3.5	36	50	9X9
25	1"	165	25	51	88.9	125	15.9	2	4-19	67	11	102	170	3.0	3.5	42	50	11X11
32	1-1/4"	178	32	63.5	98.4	135	17.5	2	4-19	76	11	111	170	3.0	3.5	42	50	11X11
40	1-1/2"	190	40	73	114.3	155	19.1	2	4-22	85	14	123	200	3.5	4.5	50	70	14X14
50	2"	216	50	92	127	165	20.7	2	8-19	93	14	131	200	3.5	4.5	50	70	14X14
65	2-1/2"	241	65	105	149.2	190	23.9	2	8-22	113	17	157	300	4.5	5.5	70	102	17X17
80	3"	282	80	127	168.3	210	27	2	8-22	126	17	170	300	4.5	5.5	70	102	17X17
100	4"	305	100	157	200	255	30.2	2	8-22	141	22	226	650	5.5	6.5	102	125	22X22
125	5"	381	125	185	216	280	33.4	2	8-22	170	25	255	650	5.5	6.5	102	125	22X22
150	6"	403	150	216	269.9	320	35	2	12-22	192	30	277	800	5.5	6.5	102	125	27X27
200	8"	502	200	269.9	330.2	380	39.7	2	12-25	234	35	280	300	5.5	6.5	102	125	27X27

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

TWO PIECE NATIONAL STANDARD HIGH PLATFORM FLANGE BALL VALVE
二片式国标高平台法兰球阀



特征 Features



- 全通径 Full port, 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: PN16/40
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- 防静电装置 (可选) Anti-static device (option)
- 带锁手柄 Locking device handle
- ISO5211直装高平台设计 ISO 5211 Direct mounting pad
- API 607 防火结构 (可选) API 607 Fire safe (option)
- 自动化装置 (可选) Automation accessories (option)

JB PN16

- 设计标准 Design: GB / T 12237
- 法兰标准 Flange dimension: JB / T 79.1
- 结构长度 Face to face: JB / T 1686
- 检验 & 测试 Inspection & testing: GB / T 13927, JB / T 9092

HG PN16/40

- 设计标准 Design: GB / T 12237
- 法兰标准 Flange dimension: HG / T 20592
- 结构长度 Face to face: GB / T 12221
- 检验 & 测试 Inspection & testing: GB / T 13927, JB / T 9092

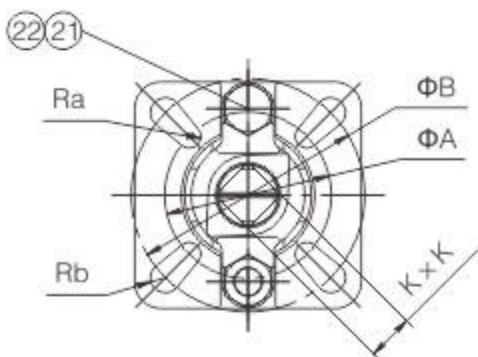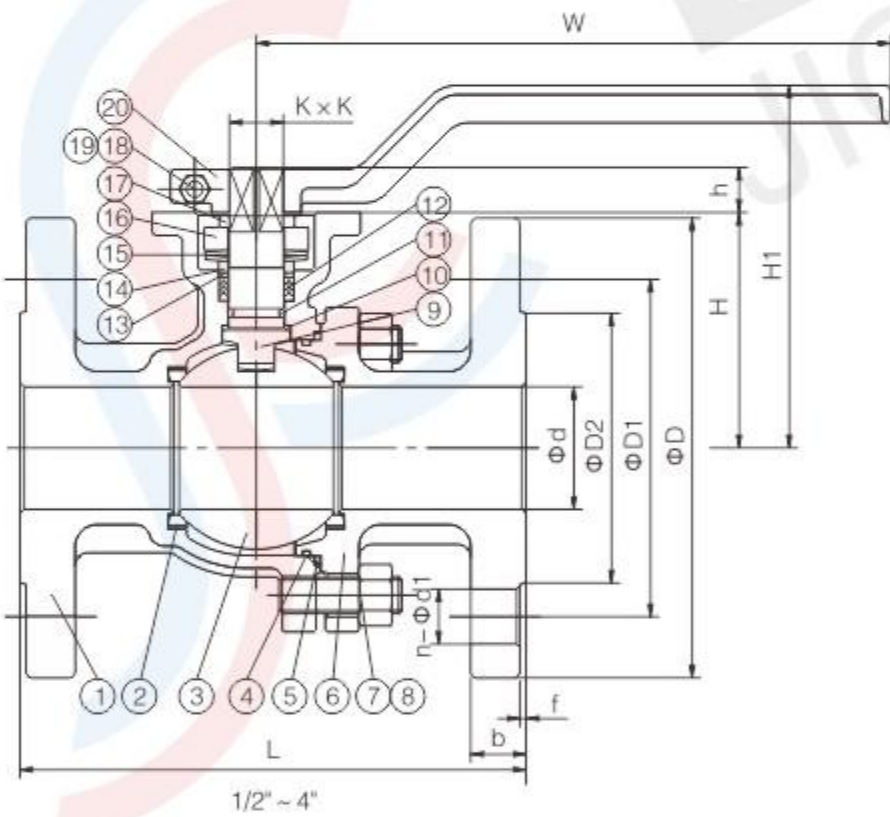

材料列表 Material List

序号 No.	零件名称 PARTS	材质 MATERIAL		
1	阀体 BODY	WCB	CF8	CF8M
2	阀座 SEAT	PTFE		
3	球体 BALL	CF8	CF8	CF8M
4	O 形圈 O-RING	FPM		
5	垫片 GASKET	PTFE		
6	阀盖 BONNET	WCB	CF8	CF8M
7	螺柱 BOLT	304		
8	螺母 NUT	304		
9	阀杆 STEM	304	304	316
10	阀杆垫圈 STEM WASHER	PTFE+25% GF		
11	O 形圈 O-RING	FPM		
12	填料 PACKING	PTFE		
13	耐磨垫 WEAR WASHER	PTFE+25% GF		
14	压圈 GLAND	304		
15	蝶形弹簧 DISC SPRING	304		
16	压板 GLAND FLANGE	CF8		
17	定位片 STOPPER	304		
18	内六角螺钉 HEX SOCKET BOLT	304		
19	螺母 NUT	304		
20	手柄 HANDLE	WCB/CF8		
21	螺栓 BOLT	304		
22	螺母 NUT	304		

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

TWO PIECE NATIONAL STANDARD HIGH PLATFORM FLANGE BALL VALVE
二片式国标高平台法兰球阀

尺寸列表 Dimensions G22 机械部 JB PN16

单位 Unit: mm

尺寸 Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15 1/2"	130	15	45	65	95	14	2	4-14	51	9	83	140	3.0	3.5	36	50	9X9
20 3/4"	140	20	55	75	105	14	2	4-14	56	9	88	140	3.0	3.5	36	50	9X9
25 1"	150/140	25	65	85	115	14	2	4-14	62	11	97	170	3.0	3.5	42	50	11X11
32 1-1/4"	165	32	78	100	135	16	2	4-18	72	11	107	170	3.0	3.5	42	50	11X11
40 1-1/2"	180	40	85	110	145	16	3	4-18	78	14	116	200	3.5	4.5	50	70	14X14
50 2"	200	50	100	125	160	16	3	4-18	86	14	124	200	3.5	4.5	50	70	14X14
65 2-1/2"	220	65	120	145	180	18	3	4-18	102	17	146	300	4.5	5.5	70	102	17X17
80 3"	250	80	135	160	195	20	3	8-18	115	17	159	300	4.5	5.5	70	102	17X17
100 4"	280	100	155	180	215	20	3	8-18	137	17	181	300	4.5	5.5	70	102	17X17
125 5"	320	125	185	210	250	22	3	8-18	170	25	255	650	5.5	6.5	102	125	22X22
150 6"	360	150	210	240	280	24	3	8-23	192	30	277	800	5.5	6.5	102	125	27X27
200 8"	400	200	265	295	335	26	3	12-23	234	35	280	300	5.5	6.5	102	125	27X27

尺寸列表 Dimensions G2S 化工部短系列 HG Short series PN16

单位 Unit: mm

尺寸 Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15 1/2"	108	15	45	65	95	16	2	4-14	55	9	87	140	3.0	3.5	36	50	9X9
20 3/4"	117	20	58	75	105	18	2	4-14	60	9	92	140	3.0	3.5	36	50	9X9
25 1"	127	25	68	85	115	18	2	4-14	67	11	102	170	3.0	3.5	42	50	11X11
32 1-1/4"	140	32	78	100	140	18	2	4-18	76	11	111	170	3.0	3.5	42	50	11X11
40 1-1/2"	165	40	88	110	150	18	2	4-18	85	14	123	200	3.5	4.5	50	70	14X14
50 2"	178	50	102	125	165	18	2	4-18	93	14	131	200	3.5	4.5	50	70	14X14
65 2-1/2"	190	65	122	145	185	18	2	8-18	113	17	157	300	4.5	5.5	70	102	17X17
80 3"	203	80	138	160	200	20	2	8-18	126	17	170	300	4.5	5.5	70	102	17X17
100 4"	229	100	158	180	220	20	2	8-18	141	17	185	300	4.5	5.5	70	102	17X17
125 5"	356	125	188	210	250	22	2	8-22	170	25	255	650	5.5	6.5	102	125	22X22
150 6"	394	150	212	240	285	22	2	8-22	192	30	277	800	5.5	6.5	102	125	27X27
200 8"	457	200	268	295	340	34	2	8-22	234	35	280	300	5.5	6.5	102	125	27X27

尺寸列表 Dimensions G21 化工部长系列 HG Long series PN16

单位 Unit: mm

尺寸 Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15 1/2"	130	15	45	65	95	16	2	4-14	55	9	87	140	3.0	3.5	36	50	9X9
20 3/4"	140	20	58	75	105	18	2	4-14	60	9	92	140	3.0	3.5	36	50	9X9
25 1"	*150/140	25	68	85	115	18	2	4-14	67	11	102	170	3.0	3.5	42	50	11X11
32 1-1/4"	165	32	78	100	140	18	2	4-18	76	11	111	170	3.0	3.5	42	50	11X11
40 1-1/2"	165	40	88	110	150	18	2	4-18	85	14	123	200	3.5	4.5	50	70	14X14
50 2"	203	50	102	125	165	18	2	4-18	93	14	131	200	3.5	4.5	50	70	14X14
65 2-1/2"	222	65	122	145	185	18	2	8-18	113	17	157	300	4.5	5.5	70	102	17X17
80 3"	241	80	138	160	200	20	2	8-18	126	17	170	300	4.5	5.5	70	102	17X17
100 4"	305	100	158	180	220	20	2	8-18	141	17	185	300	4.5	5.5	70	102	17X17
125 5"	320	125	188	210	250	22	2	8-22	170	25	255	650	5.5	6.5	102	125	22X22
150 6"	360	150	212	240	285	22	2	8-22	192	30	277	800	5.5	6.5	102	125	27X27
200 8"	400	200	268	295	340	24	2	12-22	234	35	280	300	5.5	6.5	102	125	27X27

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

注：*优先选用150

TWO-PIECE JAPANESE ELEVATION PLATFORM FLANGED BALL VALVE
二片式日标高平台法兰球阀





特点 Features

- 全通径 Full port, 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: 10K/20K
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- 防静电装置 (可选) Anti-static device (option)
- 带锁手柄 Locking device handle
- ISO5211直装高平台设计 ISO 5211 Direct mounting pad
- API 607 防火结构 (可选) API 607 Fire safe (option)
- 自动化装置 (可选) Automation accessories (option)
- 设计标准 Design: JIS B2071
- 法兰标准 Flange dimension: JIS B2220
- 结构长度 Face to face: JIS B2002
- 检验 & 测试 Inspection & testing: JIS B2003

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	SCPH2	SCS13	SCS14
2	阀座 SEAT	PTFE		
3	球体 BALL	SCS13	SCS13	SCS14
4	O 形圈 O-RING	FPM		
5	垫片 GASKET	PTFE		
6	阀盖 BONNET	SCPH2	SCS13	SCS14
7	螺栓 BOLT	304		
8	螺母 NUT	304		
9	阀杆 STEM	304	304	316
10	阀杆垫圈 STEM WASHER	PTFE+25% GF		
11	O 形圈 O-RING	FPM		
12	填料 PACKING	PTFE		
13	耐磨垫圈 WEAR WASHER	PTFE+25% GF		
14	填料盖 GLAND	304		
15	碟形弹簧 DISC SPRING	304		
16	压盖法兰 GLAND FLANGE	CF8		
17	STOPPER	304		
18	六角螺栓 HEX SOCKET BOLT	304		
19	螺母 NUT	304		
20	手柄 HANDLE	WCB/CF8		
21	螺栓 BOLT	304		
22	螺母 NUT	304		

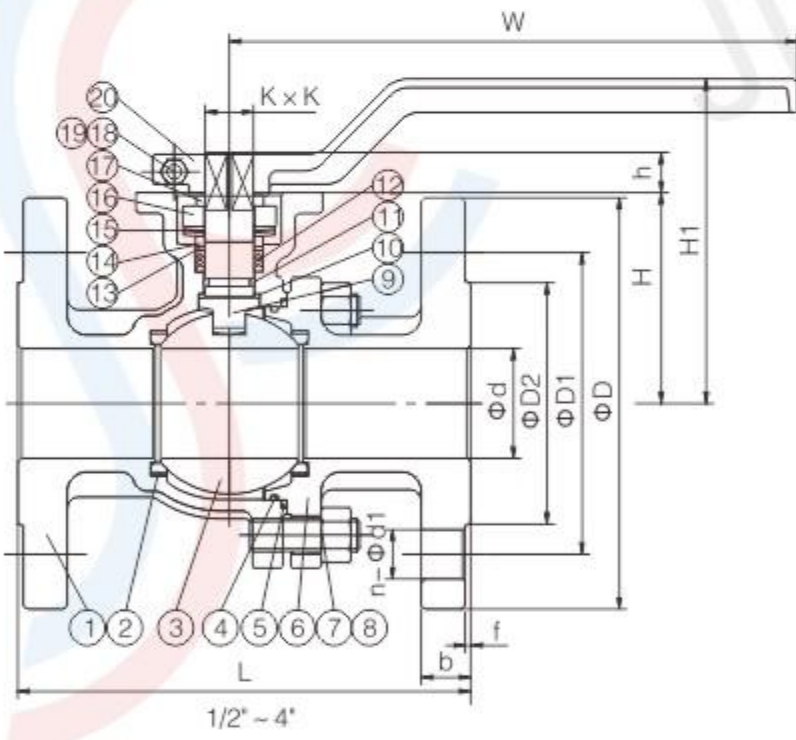

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

TWO-PIECE JAPANESE ELEVATION PLATFORM FLANGED BALL VALVE
二片式日标高平台法兰球阀

尺寸 Dimensions 10K

Unit: mm

公称直径 Nominal Diameter		L	d	D2	D1	D	b	f	n-Φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15	1/2"	108	15	51	70	95	12	1	4-15	55	9	87	140	3.0	3.5	36	50	9X9
20	3/4"	117	20	56	75	100	14	1	4-15	60	9	92	140	3.0	3.5	36	50	9X9
25	1"	127	25	67	90	125	14	1	4-19	67	11	102	170	3.0	3.5	42	50	11X11
32	1-1/4"	140	32	76	100	135	16	2	4-19	76	11	111	170	3.0	3.5	42	50	11X11
40	1-1/2"	165	40	81	105	140	16	2	4-19	85	14	123	200	3.5	4.5	50	70	14X14
50	2"	178	50	96	120	155	16	2	4-19	93	14	131	200	3.5	4.5	50	70	14X14
65	2-1/2"	190	65	116	140	175	18	2	4-19	113	17	157	300	4.5	5.5	70	102	17X17
80	3"	203	80	126	150	185	18	2	8-19	126	17	170	300	4.5	5.5	70	102	17X17
100	4"	229	100	151	175	210	18	2	8-19	141	17	185	300	4.5	5.5	70	102	17X17
125	5"	*356/300	125	182	210	250	20	2	8-23	170	25	255	650	5.5	6.5	102	125	22X22
150	6"	*394/340	150	212	240	280	22	2	8-23	192	30	277	800	5.5	6.5	102	125	27X27
200	8"	*457/450	200	262	290	330	22	2	12-23	234	35	280	300	5.5	6.5	102	125	27X27

尺寸 Dimensions 20K

Unit: mm

公称直径 Nominal Diameter		L	d	D2	D1	D	b	f	n-Φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15	1/2"	140	15	51	70	95	14	1	4-15	55	9	87	140	3.0	3.5	36	50	9X9
20	3/4"	152	20	56	75	100	16	1	4-15	60	9	92	140	3.0	3.5	36	50	9X9
25	1"	165	25	67	90	125	16	1	4-19	67	11	102	170	3.0	3.5	42	50	11X11
32	1-1/4"	178	32	76	100	135	18	2	4-19	76	11	111	170	3.0	3.5	42	50	11X11
40	1-1/2"	190	40	81	105	140	18	2	4-19	85	14	123	200	3.5	4.5	50	70	14X14
50	2"	216	50	96	120	155	18	2	8-19	93	14	131	200	3.5	4.5	50	70	14X14
65	2-1/2"	241	65	116	140	175	20	2	8-19	113	17	157	300	4.5	5.5	70	102	17X17
80	3"	282	80	132	160	200	22	2	8-23	126	17	170	300	4.5	5.5	70	102	17X17
100	4"	305	100	160	185	225	24	2	8-23	141	22	226	650	5.5	6.5	102	125	22X22
125	5"	*356/381	125	195	225	270	26	2	8-25	170	25	255	650	5.5	6.5	102	125	22X22
150	6"	*403*394	150	230	260	365	28	2	12-25	192	30	277	800	5.5	6.5	102	125	27X27
200	8"	*502/457	200	275	305	350	30	2	12-25	234	35	280	300	5.5	6.5	102	125	27X27

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

注：*优先选用150

TWO PIECE GERMAN STANDARD FLANGED BALL VALVE
二片式德标高平台法兰球阀



特点 Features

- 全通径 Full port, 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: PN16/40
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- 防静电装置 (可选) Anti-static device (option)
- 带锁手柄 Locking device handle
- ISO5211直装高平台设计 ISO 5211 Direct mounting pad
- 自动化装置 (可选) Automation accessories (option)
- 设计标准 Design: EN1983, EN12516-1
- 法兰标准 Flange dimension: DIN 2543~2545, EN1092-1 PN16/40
- 结构长度 Face to face: DIN3202 part1-F4(DN15~DN100),
DIN3202 part1-F5(DN125~DN300)
- 检验 & 测试 Inspection & testing: DIN3230, EN12266-1

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	1.0619	1.4308	1.4408
2	阀座 SEAT	PTFE		
3	球体 BALL	1.4308	1.4308	1.4408
4	O 形圈 O-RING	FPM		
5	垫片 GASKET	PTFE		
6	阀盖 BONNET	1.0619	1.4308	1.4408
7	螺栓 BOLT	304		
8	螺母 NUT	304		
9	阀杆 STEM	304	304	316
10	阀杆垫圈 STEM WASHER	PTFE+25% GF		
11	O 形圈 O-RING	FPM		
12	PACKING	PTFE		
13	耐磨垫圈 WEAR WASHER	PTFE+25% GF		
14	填料盖 GLAND	304		
15	碟形弹簧 DISC SPRING	304		
16	压盖法兰 GLAND FLANGE	CF8		
17	STOPPER	304		
18	六角螺栓 HEX SOCKET BOLT	304		
19	螺母 NUT	304		
20	手柄 HANDLE	WCB/CF8		
21	螺栓 BOLT	304		
22	螺母 NUT	304		

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

TWO PIECE GERMAN STANDARD FLANGED BALL VALVE
二片式德标高平台法兰球阀

尺寸 Dimensions PN16

Unit: mm

公称直径 Nominal Diameter		L	d	D2	D1	D	b	f	n-Φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15	1/2"	115	15	45	65	95	16	2	4-14	55	9	87	140	3.0	3.5	36	50	9X9
20	3/4"	120	20	58	75	105	18	2	4-14	60	9	92	140	3.0	3.5	36	50	9X9
25	1"	125	25	68	85	115	18	2	4-14	67	11	102	170	3.0	3.5	42	50	11X11
32	1-1/4"	130	32	78	100	140	18	2	4-18	76	11	111	170	3.0	3.5	42	50	11X11
40	1-1/2"	140	40	88	110	150	18	3	4-18	85	14	123	200	3.5	4.5	50	70	14X14
50	2"	150	50	102	125	165	20	3	4-18	93	14	131	200	3.5	4.5	50	70	14X14
65	2-1/2"	170	65	122	145	185	18	3	4-18	113	17	157	300	4.5	5.5	70	102	17X17
80	3"	180	80	138	160	200	20	3	8-18	126	17	170	300	4.5	5.5	70	102	17X17
100	4"	190	100	158	180	220	20	3	8-18	141	17	185	300	4.5	5.5	70	102	17X17
125	5"	325	125	188	210	250	22	3	8-18	170	25	255	650	5.5	6.5	102	125	22X22
150	6"	350	150	212	240	285	22	3	8-22	192	30	277	800	5.5	6.5	102	125	27X27
200	8"	400	200	268	295	340	24	3	8-22	234	35	280	300	5.5	6.5	102	125	27X27

尺寸 Dimensions PN40

Unit: mm

公称直径 Nominal Diameter		L	d	D2	D1	D	b	f	n-Φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15	1/2"	115	15	45	65	95	16	2	4-14	55	9	87	140	3.0	3.5	36	50	9X9
20	3/4"	120	20	58	75	105	18	2	4-14	60	9	92	140	3.0	3.5	36	50	9X9
25	1"	125	25	68	85	115	18	2	4-14	67	11	102	170	3.0	3.5	42	50	11X11
32	1-1/4"	130	32	78	100	140	18	2	4-18	76	11	111	170	3.0	3.5	42	50	11X11
40	1-1/2"	140	40	88	110	150	18	3	4-18	85	14	123	200	3.5	4.5	50	70	14X14
50	2"	150	50	102	125	165	20	3	4-18	93	14	131	200	3.5	4.5	50	70	14X14
65	2-1/2"	170	65	122	145	185	22	3	8-18	113	17	157	300	4.5	5.5	70	102	17X17
80	3"	180	80	138	160	200	24	3	8-18	126	17	170	300	4.5	5.5	70	102	17X17
100	4"	190	100	162	190	235	24	3	8-22	141	22	226	650	5.5	6.5	102	125	22X22
125	5"	325	125	188	220	270	26	3	8-26	170	25	255	650	5.5	6.5	102	125	22X22
150	6"	350	150	218	250	300	28	3	8-26	192	30	277	800	5.5	6.5	102	125	27X27
200	8"	400	200	285	320	375	34	3	12-30	234	35	280	300	5.5	6.5	102	125	27X27

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

THREE PIECE HIGH PLATFORM FLANGE BALL VALVE
三片式高平台法兰球阀



特征 Features

- 全通径 Full port, 1/2"~6" (DN15~DN150)
- 阀体工作压力 Body W.P.: 1000WOG (PN63)
- 法兰端工作压力 Flange end W.P.: PN16/40, CLASS 150/300
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- ISO5211直装高平台设计 (可选) ISO5211 Direct mounting pad (option)
- 手柄带锁装置 (可选) Locking device handle (option)

F3B 国标 GB PN16

- 设计标准 Design: GB / T 12237
- 法兰标准 Flange dimension: JB / T 79.1
- 检验 & 测试 Inspection & testing: GB / T 13927, JB / T 9092

F3C 美标 ANSI CLASS 150/300

- 设计标准 Design: ASME B16.34
- 法兰标准 Flange dimension: ASME B16.5
- 检验 & 测试 Inspection & testing: API 598

F3D 德标 DIN PN16/40

- 设计标准 Design: EN1983, EN12516-1
- 法兰标准 Flange dimension: DIN 2543~2545
EN1092-1 PN16/40
- 结构长度 Face to face: DIN 3202-F1, EN 558-1
- 检验 & 测试 Inspection & testing: DIN 3230, EN12266-1

材料列表 Material List (1/2"~4")

序号 No.	零件名称 PARTS	材质 MATERIAL		
1	阀盖 BONNET	WCB	CF8	CF8M
2	垫片 GASKET	PTFE		
3	阀座 SEAT	PTFE		
4	球体 BALL	CF8	CF8	CF8M
5	阀体 BODY	WCB	CF8	CF8M
6	螺柱 BOLT	304		
7	弹垫 SPRING WASHER	304		
8	螺母 NUT	304		
9	阀杆 STEM	304	304	316
10	阀杆垫圈 STEM WASHER	PTFE		
11	填料 PACKING	PTFE		
12	压盖 GLAND	304		
13	手柄 HANDLE	304+PVC		
14	弹垫 SPRING WASHER	304		
15	螺母 NUT	304		

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

THREE PIECE HIGH PLATFORM FLANGE BALL VALVE
三片式高平台法兰球阀

尺寸列表 Dimensions F3B 国标 GB PN16

单位 Unit: mm

尺寸 Nominal Diameter	L	d	D2	D1	D	b	f	n-Φd1	H	W
15	130	15	45	65	95	14	2	4-14	86	120
20	150	20	55	75	105	14	2	4-14	92	130
25	160	25	65	85	115	14	2	4-14	98	160
32	180	32	78	100	135	16	2	4-18	116	180
40	200	40	85	110	145	16	3	4-18	120	200
50	230	50	100	125	160	16	3	4-18	127	240
65	290	65	120	145	180	18	3	4-18	138	260
80	310	80	135	160	195	20	3	8-18	150	300
100	350	100	155	180	215	20	3	8-18	168	350
125	400	125	185	210	250	22	3	8-18	220	650
150	480	150	210	240	285	22	3	8-22	245	800

尺寸列表 Dimensions F3C 美标 ANSI CLASS 150

单位 Unit: mm

尺寸 Nominal Diameter	L	d	D2	D1	D	b	f	n-Φd1	H	W
15	130	15	35	60.3	90	8	2	4-16	86	120
20	150	20	43	69.9	100	8.9	2	4-16	92	130
25	160	25	51	79.4	110	9.6	2	4-16	98	160
32	180	32	63.5	88.9	115	11.2	2	4-16	116	180
40	200	40	73	98.4	125	12.7	2	4-16	120	200
50	230	50	92	120.7	150	14.3	2	4-19	127	240
65	290	65	105	139.7	180	15.9	2	4-19	138	260
80	310	80	127	152.4	190	17.5	2	4-19	150	300
100	350	100	157	190.5	230	22.3	2	8-19	168	350
125	400	125	185	216	255	22.3	2	8-22	220	650
150	480	150	216	241.3	280	23.9	2	8-22	245	800

尺寸列表 Dimensions F3D 德标 DIN PN16

单位 Unit: mm

尺寸 Nominal Diameter	L	d	D2	D1	D	b	f	n-Φd1	H	W
15	130	15	45	65	95	16	2	4-14	86	120
20	150	20	58	75	105	18	2	4-14	92	130
25	160	25	68	85	115	18	2	4-14	98	160
32	180	32	78	100	140	18	2	4-18	116	180
40	200	40	88	110	150	18	3	4-18	120	200
50	230	50	102	125	165	20	3	4-18	127	240
65	290	65	122	145	185	18	3	4-18	138	260
80	310	80	138	160	200	20	3	8-18	150	300
100	350	100	158	180	220	20	3	8-18	168	350
125	400	125	188	210	250	22	3	8-18	220	650
150	480	150	212	240	285	22	3	8-22	245	800

尺寸列表 Dimensions 德标 DIN PN40

单位 Unit: mm

尺寸 Nominal Diameter	L	d	D2	D1	D	b	f	n-Φd1	H	W
15	130	15	45	65	95	16	2	4-14	86	120
20	150	20	58	75	105	18	2	4-14	92	130
25	160	25	68	85	115	18	2	4-14	98	160
32	180	32	78	100	140	18	2	4-18	116	180
40	200	40	88	110	150	18	3	4-18	120	200
50	230	50	102	125	165	20	3	4-18	127	240
65	290	65	122	145	185	22	3	8-18	138	260
80	310	80	138	160	200	24	3	8-18	150	300
100	350	100	162	190	235	24	3	8-22	168	350
125	400	125	188	220	270	26	3	8-26	220	650
150	480	150	218	250	300	28	3	8-26	245	800

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

HIGH PLATFORM THIN BALL VALVE
高平台薄型球阀



特点 Features

- 全通径 Full port, 1/2"~8" (DN15~DN200)
- 工作压力 W.P.: PN16/40 CLASS 150
- 工作温度 W.T.: -20°C~180°C
- 对夹式 Wafer type
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- 双螺形弹簧动负载设计 Live-loading design
- 防静电装置 (可选) Anti-static device (option)
- 手柄带锁装置 (可选) Locking device handle (option)
- ISO5211直装高平台设计 ISO 5211 Direct mounting pad
- 自动化装置 (可选) Automation accessories (option)
- 检验 & 测试 Inspection & testing: JB/T 9092 API 598

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB	CF8	CF8M
2	阀座 SEAT	PTFE		
3	BALL	CF8	CF8	CF8M
4	垫片 GASKET	PTFE		
5	阀盖 BONNET	WCB	CF8	CF8M
6	阀杆 STEM	304	304	316
7	阀杆垫圈 STEM WASHER	PTFE+25% GF		
8	O 形圈 O-RING	FPM		
9	填料 PACKING	PTFE		
10	耐磨垫圈 WEAR WASHER	PTFE+25% GF		
11	填料盖 GLAND	304		
12	碟形弹簧 DISC SPRING	304		
13	螺母 NUT	304		
14	最高垫圈 CROWN WASHER	304		
15	垫圈 WASHER	304		
16	手柄 HANDLE	304+PVC		
17	六角螺栓 HEX SOCKET BOLT	304		
18	螺母 NUT	304		

尺寸 Dimensions PN16

Nominal Diameter	L	d	D2	D1	D	b	f	n-M	H	W	Ra	Rb	A	B	K×K
15 1/2"	36	15	45	65	95	10	2	4-M12	81	150	3.0	3.0	36	42	9X9
20 3/4"	39	20	55	75	105	10.5	2	4-M12	86	150	3.0	3.0	36	42	9X9
25 1"	43	25	65	85	115	12	2	4-M12	93	180	3.0	3.5	42	50	11X11
32 1-1/4"	53.5	32	78	100	135	15	2	4-M16	103	180	3.0	3.5	42	50	11X11
40 1-1/2"	64	38	85	110	145	16	2.5	4-M16	120	210	3.5	4.5	50	70	14X14
50 2"	72	44	100	125	160	16.5	2.5	4-M16	127	210	3.5	4.5	50	70	14X14
65 2-1/2"	96	57	120	145	180	18	3	4-M16	144	260	4.5	5.5	70	102	17X17
80 3"	118	73	135	160	195	20	3	8-M16	154	260	4.5	5.5	70	102	17X17
100 4"	140	90	155	180	215	20	3	8-M16	172	330	4.5	5.5	70	102	17X17
125 5"	180	110	185	210	250	22	3	8-M16	220	650	5.5	6.5	102	125	22X22
150 6"	230	145	210	240	285	22	3	8-M20	245	800	5.5	6.5	102	125	27X27
200 8"	275	195	265	295	340	24	3	12-M20	340	1000	5.5	6.5	102	125	27X27

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

THREE-WAY, FOUR-WAY HIGH PLATFORM BALL VALVE
三通、四通高平台球阀



特点 Features

- 缩径 T型 / L型 / X型 Reduced port T port / L port / X port, 1/2"~6" (DN15~DN150)
- 工作压力 W.P.: CLASS 150/300 PN16/40 10K
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- 双螺形弹簧动负载设计 Live-loading design
- 防静电装置 (可选) Anti-static device (option)
- 4个阀座设计 There are four seats
- 360° 旋转手柄 360° Rotary handle
- 带锁手柄 Locking device handle
- ISO5211直装高平台设计 ISO 5211 Direct mounting pad
- 自动化装置 (可选) Automation accessories (option)
- 美标 ANSI CLASS 150
- 设计标准 Design: ASME B16.34, API608, API6D
- 法兰标准 Flange dimension: ASME B16.5
- 检验 & 测试 Inspection & testing: API 598
- 德标 DIN PN16
- 设计标准 Design: EN1983, EN12516-1
- 法兰标准 Flange dimension: EN1092-1 PN16/40
- 检验 & 测试 Inspection & testing: EN12266-1
- 日标 JIS 10K
- 设计标准 Design: JIS B2071
- 法兰标准 Flange dimension: JIS B2220
- 检验 & 测试 Inspection & testing: JIS B2003

材料表 Material List


序号No.	零件 PARTS	材料 MATERIAL		
1	阀盖 BONNET	WCB	CF8	CF8M
2	垫片 GASKET	PTFE		
3	阀座 SEAT	PTFE		
4	球体 BALL	CF8	CF8	CF8M
5	阀体 BODY	WCB	CF8	CF8M
6	螺栓 BOLT	304		
7	阀杆 STEM	304	304	316
8	阀杆垫圈 STEM WASHER	PTFE+25% GF		
9	O 形圈 O-RING	FPM		
10	填料 PACKING	PTFE		
11	耐磨垫圈 WEAR WASHER	PTFE+25% GF		
12	填料盖 GLAND	304		
13	碟形弹簧 DISC SPRING	304		
14	六角螺栓 HEX SOCKET BOLT	304		
15	螺母 NUT	304		
16	手柄 HANDLE	WCB/CF8		
17	STOPPER	304		
18	压盖法兰 GLAND FLANGE	CF8		
19	螺栓 BOLT	304		
20	螺母 NUT	304		
14※	三通 TEE	WCB/CF8		
15※	六角套筒螺钉 HEX SOCKET SET SCREW	304		
16※	手柄 HANDLE	Q235A		

尺寸 Dimensions CLASS 150

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15 1/2"	150	15	35	60.3	90	10	2	4-16	50	9	82	140	3.0	3.5	36	50	9X9
20 3/4"	165	20	43	70	100	10.5	2	4-16	60	9	92	140	3.0	3.5	36	50	9X9
25 1"	181	25	51	79.4	110	10.5	2	4-16	65	11	100	170	3.0	3.5	42	50	11X11
32 1-1/4"	190	32	63.5	88.9	115	11.2	2	4-16	80	11	115	170	3.0	3.5	42	50	11X11
40 1-1/2"	212	40	73	98.4	125	12.7	2	4-16	90	14	128	200	3.5	4.5	50	70	14X14
50 2"	229	50	92	120.7	150	14.3	2	4-19	106	14	144	200	3.5	4.5	50	70	14X14
65 2-1/2"	290	65	105	139.7	180	15.9	2	4-19	118	17	162	300	4.5	5.5	70	102	17X17
80 3"	310	80	127	152.4	190	17.5	2	4-19	128	17	172	300	4.5	5.5	70	102	17X17
100 4"	368	100	157	190.5	230	22.3	2	8-19	165	25	250	650	5.5	6.5	102	125	22X22
125 5"	420	125	185	216	255	22.3	2	8-22	212	30	297	800	5.5	6.5	102	125	27X27
150 6"	480	150	216	241.3	280	23.9	2	8-22	243	30	328	800	5.5	6.5	102	125	27X27

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

AMERICAN STANDARD FLANGE GATE VALVE
美标法兰闸阀

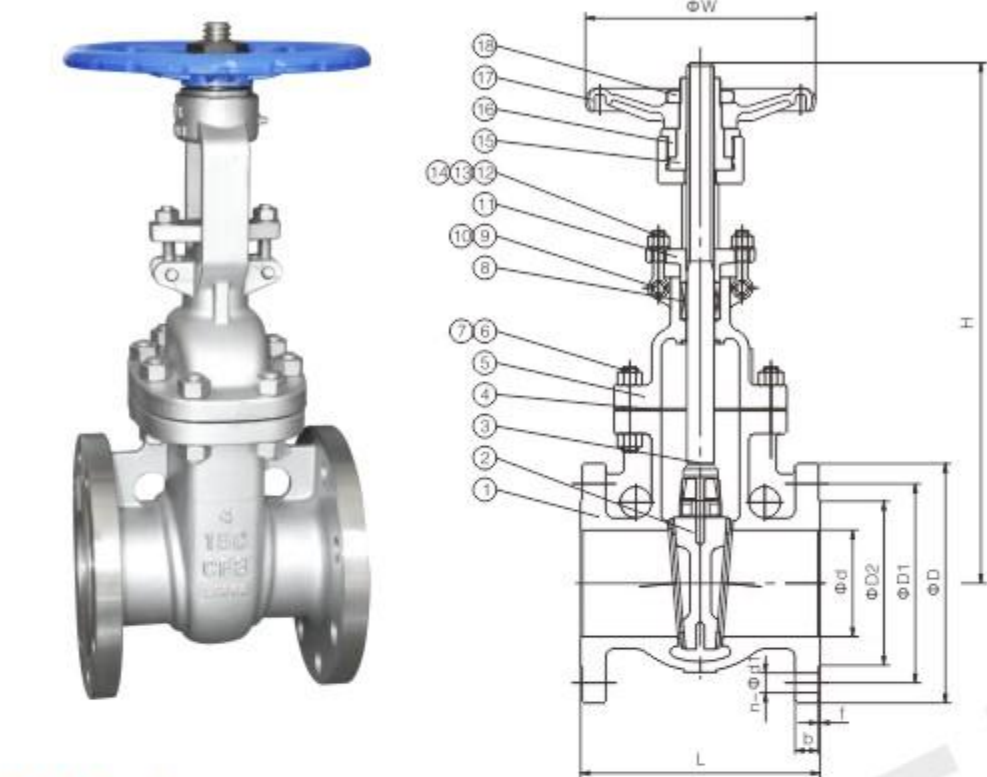

特点 Features

- 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: CLASS 150 / 300
- 工作温度 W.T.: -425°C
- 升杆式/明杆 Rising stem
- 设计标准 Design: ASME B16.34, API600, API603
- 法兰标准 Flange dimension: ASME B16.5
- 结构长度 Face to face: ASME B16.10
- 检验 & 测试 Inspection & testing: API600/API603/ASME16.34

尺寸 Dimensions CLASS 150

Nominal	Diameter	L	d	D2	D1	D	b	f	n-Φd1	H	W
15	1/2"	108	15	35	60.3	90	8	2	4-16	178	120
20	3/4"	117	20	43	70	100	8.9	2	4-16	194	120
25	1"	127	25	51	79.4	110	9.6	2	4-16	223	140
32	1-1/4"	140	32	63.5	88.9	115	11.2	2	4-16	266	160
40	1-1/2"	165	40	73	98.4	125	12.7	2	4-16	295	160
50	2"	178	50	92	120.7	150	14.3	2	4-19	336	200
65	2-1/2"	190	65	105	139.7	180	15.9	2	4-19	385	200
80	3"	203	80	127	152.4	190	17.5	2	4-19	433	250
100	4"	229	100	157	190.5	230	22.3	2	8-19	506	300
125	5"	254	125	185	216	255	22.3	2	8-22	612	300
150	6"	267	150	216	241.3	280	23.9	2	8-22	686	350
200	8"	292	200	270	298.5	345	27	2	8-22	825	350
250	10"	330	250	324	362	405	28.6	2	12-25	972	400
300	12"	356	300	381	431.8	485	30.2	2	12-25	1147	450


尺寸 Dimensions CLASS 300

Nominal	Diameter	L	d	D2	D1	D	b	f	n-Φd1	H	W
15	1/2"	140	15	35	66.7	95	12.7	2	4-16	182	120
20	3/4"	152	20	43	82.6	115	14.3	2	4-19	197	140
25	1"	165	25	51	88.9	125	15.9	2	4-19	229	160
32	1-1/4"	178	32	63.5	98.4	135	17.5	2	4-19	271	160
40	1-1/2"	190	40	73	114.3	155	19.1	2	4-22	299	200
50	2"	216	50	92	127	165	20.7	2	8-19	343	200
65	2-1/2"	241	65	105	149.2	190	23.9	2	8-22	392	250
80	3"	282	80	127	168.3	210	27	2	8-22	443	300
100	4"	305	100	157	200	255	30.2	2	8-22	515	300
125	5"	381	125	185	235	280	33.4	2	8-22	624	350
150	6"	403	150	216	270	320	35	2	12-22	695	350
200	8"	419	200	270	330.2	380	39.7	2	12-25	842	400
250	10"	457	250	324	387.4	445	46.1	2	16-29	989	450
300	12"	502	300	381	450.8	520	49.3	2	16-32	1158	500

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

JAPANESE STANDARD FLANGE GATE VALVE
日标法兰闸阀

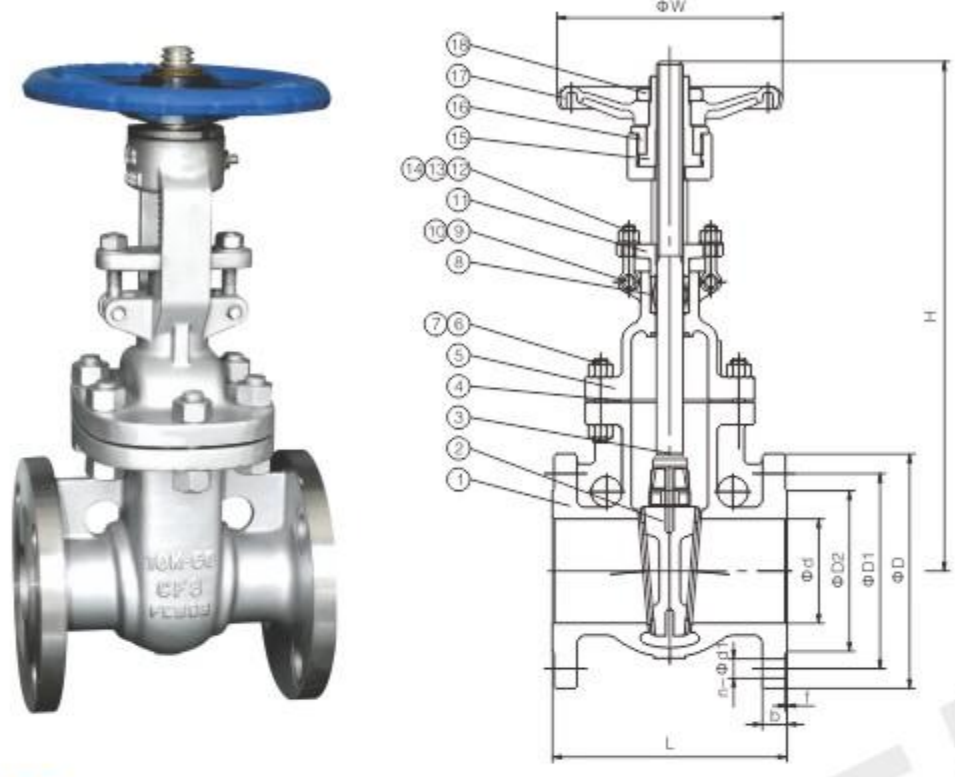

特点 Features

- 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: 10K / 20K
- 工作温度 W.T.: 425°C
- 升杆式/明杆 Rising stem
- 设计标准 Design: JIS B2071
- 法兰标准 Flange dimension: JIS 2220
- 结构长度 Face to face: JIS B2002
- 检验 & 测试 Inspection & testing: JIS B2071

尺寸 Dimensions 10K


Nominal	Diameter	L	d	D2	D1	D	b	f	n-Φd1	H	W
15	1/2"	108	15	51	70	95	12	1	4-15	178	120
20	3/4"	117	20	56	75	100	14	1	4-15	194	120
25	1"	127	25	67	90	125	14	1	4-19	223	140
32	1-1/4"	140	32	76	100	135	16	2	4-19	266	160
40	1-1/2"	165	40	81	105	140	16	2	4-19	295	160
50	2"	178	50	96	120	155	16	2	4-19	336	200
65	2-1/2"	190	65	116	140	175	18	2	4-19	385	200
80	3"	203	80	126	150	185	18	2	8-19	433	250
100	4"	229	100	151	175	210	18	2	8-19	506	300
125	5"	254	125	182	210	250	20	2	8-23	612	300
150	6"	267	150	212	240	280	22	2	8-23	686	350
200	8"	292	200	262	290	330	22	2	12-23	825	350
250	10"	330	250	324	355	400	24	2	12-25	972	400
300	12"	356	300	368	400	445	24	3	16-25	1147	450

尺寸 Dimensions 20K

Nominal	Diameter	L	d	D2	D1	D	b	f	n-Φd1	H	W
15	1/2"	140	15	51	70	95	14	1	4-15	182	120
20	3/4"	152	20	56	75	100	16	1	4-15	197	140
25	1"	165	25	67	90	125	16	1	4-19	229	160
32	1-1/4"	178	32	76	100	135	18	2	4-19	271	160
40	1-1/2"	190	40	81	105	140	18	2	4-19	299	200
50	2"	216	50	96	120	155	18	2	8-19	343	200
65	2-1/2"	241	65	116	140	175	20	2	8-19	392	250
80	3"	282	80	132	160	200	22	2	8-23	443	300
100	4"	305	100	160	185	225	24	2	8-23	515	300
125	5"	381	125	195	225	270	26	2	8-25	624	350
150	6"	403	150	230	260	305	28	2	12-25	695	350
200	8"	419	200	275	305	350	30	2	12-25	842	400
250	10"	457	250	345	380	430	34	2	12-27	989	450
300	12"	502	300	395	430	480	36	3	16-27	1158	500

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

NATIONAL STANDARD FLANGE GATE VALVE
国标法兰闸阀

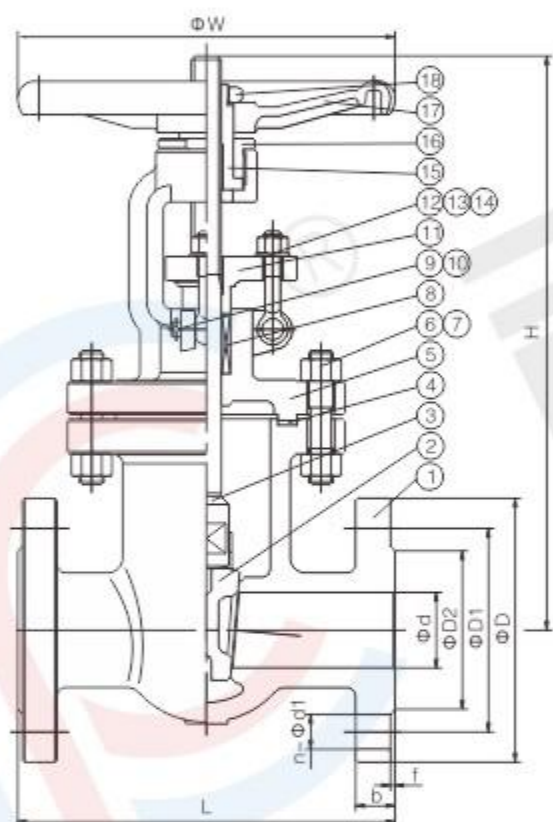

特点 Features

- 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: 1/2"~2" PN40 2-1/2"~12" PN16
- 工作温度 W.T.: 425°C
- 升杆式/明杆 Rising stem
- 设计标准 Design:GB/T12234
- 法兰标准 Flange dimension:GB/T9113.1
- 检验 & 测试 Inspection & testing:GB/T 12234

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB+13Cr	CF8	CF8M
2	阀瓣 DISC	WCB+13Cr	CF8	CF8M
3	阀杆 STEM	20Cr13	304	316
4	垫片 GASKET	PTFE/304+GRAPHITE		
5	阀盖 BONNET	WCB	CF8	CF8M
6	螺栓 BOLT	35CrMo	304	304
7	螺母 NUT	45	304	304
8	填料 PACKING	PTFE/FLEXIBLE GRAPHITE		
9	CLEVIS PIN WITH HEAD	35	304	304
10	SPLIT PIN	Q235A	304	304
11	填料盖 GLAND	WCB	CF8	CF8
12	EYE BOLTS	35CrMo	304	304
13	平板 FLAT PAD	65Mn	304	304
14	螺母 NUT	45	304	304
15	阀杆螺母 STEM NUT	BRONZE		
16	阀盖螺母 BONNET NUT	45	304	304
17	手轮 HANDWHEEL	FCD/WCB		
18	ROUND NUT	45	304	304

尺寸 Dimensions PN16


Unit: mm

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	W
15	130	15	45	65	95	14	2	4-14	178	120
20	150	20	55	75	105	14	2	4-14	194	140
25	160	25	65	85	115	14	2	4-14	223	140
32	180	32	78	100	135	16	2	4-18	266	160
40	200	40	85	110	145	16	3	4-18	295	160
50	250	50	100	125	160	16	3	4-18	336	200
65	265	65	120	145	180	18	3	4-18	385	200
80	280	80	135	160	195	20	3	8-18	433	250
100	300	100	155	180	215	20	3	8-18	506	300
125	325	125	185	210	250	22	3	8-18	612	300
150	350	150	210	240	285	22	3	8-22	686	350
200	400	200	265	295	340	24	3	12-22	825	350
250	450	250	320	355	405	26	3	12-26	972	400
300	500	300	375	410	460	28	3	12-26	1147	450

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

AMERICAN STANDARD FLANGE GLOBE VALVE
美标法兰截止阀

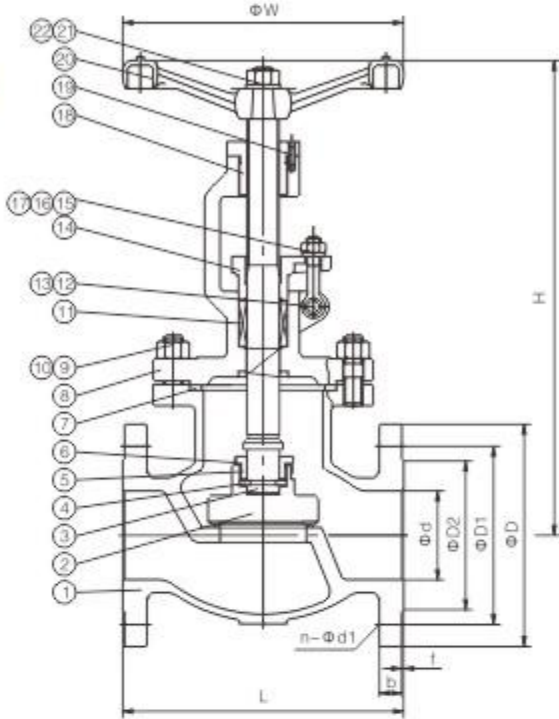

特点 Features

- 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: CLASS 150 / 300
- 工作温度 W.T.: 425°C
- 升杆式/明杆 Rising stem
- 设计标准 Design: ASME B16.34,BS1873,API 623
- 法兰标准 Flange dimension: ASME B16.5
- 结构长度 Face to face: ASME B16.10
- 检验 & 测试 Inspection & testing: API623/BS1873/ASME16.34

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB+13Cr	CF8	CF8M
2	DISC	WCB+13Cr	CF8	CF8M
3	阀杆 STEM	20Cr13	304	316
4	OPEN RING	45	304	316
5	DISC NUT	35	304	316
6	THRUST WASHER	Q235A	304	316
7	垫片 GASKET	PTFE/304+GRAPHITE		
8	阀盖 BONNET	WCB	CF8	CF8M
9	螺栓 BOLT	35CrMo	304	304
10	螺母 NUT	45	304	304
11	填料 PACKING	PTFE/FLEXIBLE GRAPHITE		
12	CLEVIS PIN WITH HEAD	35	304	304
13	SPLIT PIN	Q235A	304	304
14	填料盖 GLAND	WCB	CF8	CF8
15	EYE BOLTS	35CrMo	304	304
16	平板 FLAT PAD	65Mn	304	304
17	螺母 NUT	45	304	304
18	阀杆螺母 STEM NUT	BRONZE		
19	SCREWS	35CrMo	304	304
20	手轮 HANDWHEEL	FCD/WCB		
21	平板 FLAT PAD	65Mn	304	304
22	螺母 NUT	45	304	304

尺寸 Dimensions CLASS 150

Unit: mm

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	W
15	108	15	35	60.3	90	8	2	4-16	178	120
20	117	20	43	70	100	8.9	2	4-16	182	140
25	127	25	51	79.4	110	9.6	2	4-16	201	140
32	140	32	63.5	88.9	115	11.2	2	4-16	238	160
40	165	40	73	98.4	125	12.7	2	4-16	249	160
50	203	50	92	120.7	150	14.3	2	4-19	263	200
65	216	65	105	139.7	180	15.9	2	4-19	312	200
80	241	80	127	152.4	190	17.5	2	4-19	336	250
100	292	100	157	190.5	230	22.3	2	8-19	388	300
125	356	125	185	216	255	22.3	2	8-22	467	350
150	406	150	216	241.3	280	23.9	2	8-22	529	400
200	495	200	270	298.5	345	27	2	8-22	667	450
250	622	250	324	362	405	28.6	2	12-25	825	500
300	698	300	381	431.8	485	30.2	2	12-25	947	600


尺寸 Dimensions CLASS 300

Unit: mm

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	W
15	152	15	35	66.7	95	12.7	2	4-16	182	140
20	178	20	43	82.6	115	14.3	2	4-19	187	140
25	203	25	51	88.9	125	15.9	2	4-19	208	160
32	216	32	63.5	98.4	135	17.5	2	4-19	244	160
40	229	40	73	114.3	155	19.1	2	4-22	255	200
50	267	50	92	127	165	20.7	2	8-19	269	200
65	292	65	105	149.2	190	23.9	2	8-22	320	250
80	318	80	127	168.3	210	27	2	8-22	341	250
100	356	100	157	200	255	30.2	2	8-22	393	300
125	400	125	185	235	280	33.4	2	8-22	477	350
150	444	150	216	270	320	35	2	12-22	541	400
200	559	200	270	330.2	380	39.7	2	12-25	682	500
250	622	250	324	387.4	445	46.1	2	16-29	839	600
300	711	300	381	450.8	520	49.3	2	16-32	957	650

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

JAPANESE STANDARD FLANGE GLOBE VALVE
日标法兰截止阀

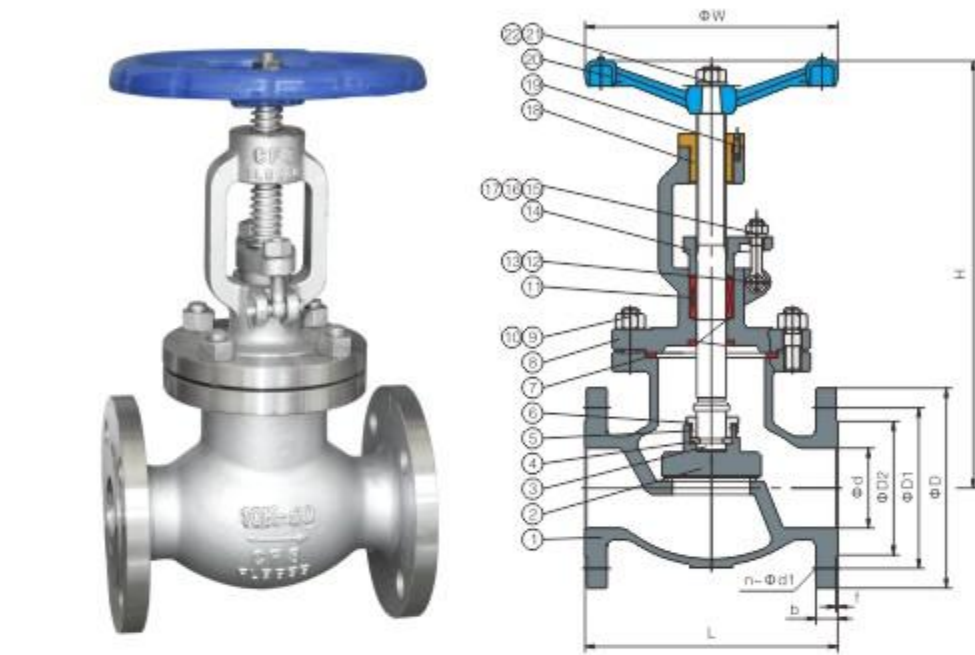

特点 Features

- 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: 10K / 20K
- 工作温度 W.T.: 425°C
- 升杆式/明杆 Rising stem
- 设计标准 Design: JISB2071
- 法兰标准 Flange dimension: JIS 2220
- 结构长度 Face to face: JIS B2002
- 检验 & 测试 Inspection & testing: JIS B2071

尺寸 Dimensions 10K

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	W
15 1/2"	108	15	51	70	95	12	1	4-15	178	120
20 3/4"	117	20	56	75	100	14	1	4-15	182	140
25 1"	127	25	67	90	125	14	1	4-19	201	140
32 1-1/4"	140	32	76	100	135	16	2	4-19	238	160
40 1-1/2"	165	40	81	105	140	16	2	4-19	249	160
50 2"	203	50	96	120	155	16	2	4-19	263	200
65 2-1/2"	216	65	116	140	175	18	2	4-19	312	200
80 3"	241	80	126	150	185	18	2	8-19	336	250
100 4"	292	100	151	175	210	18	2	8-19	388	300
125 5"	356	125	182	210	250	20	2	8-23	467	350
150 6"	406	150	212	240	280	22	2	8-23	529	400
200 8"	495	200	262	290	330	22	2	12-23	667	450
250 10"	622	250	324	355	400	24	2	12-25	825	500
300 12"	698	300	368	400	445	24	3	16-25	947	600

尺寸 Dimensions 20K

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	W
15 1/2"	152	15	51	70	95	14	1	4-15	182	140
20 3/4"	178	20	56	75	100	16	1	4-15	187	140
25 1"	203	25	67	90	125	16	1	4-19	208	160
32 1-1/4"	216	32	76	100	135	18	2	4-19	244	160
40 1-1/2"	229	40	81	105	140	18	2	4-19	255	200
50 2"	267	50	96	120	155	18	2	8-19	269	200
65 2-1/2"	292	65	116	140	175	20	2	8-19	320	250
80 3"	318	80	132	160	200	22	2	8-23	341	250
100 4"	356	100	160	185	225	24	2	8-23	393	300
125 5"	400	125	195	225	270	26	2	8-25	477	350
150 6"	444	150	230	260	305	28	2	12-25	541	400
200 8"	559	200	275	305	350	30	2	12-25	682	500
250 10"	622	250	345	380	430	34	2	12-27	839	600
300 12"	711	300	395	430	480	36	3	16-27	957	650

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

NATIONAL STANDARD FLANGE GLOBE VALVE
国标法兰截止阀



特点 Features

- 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: 1/2"~2" PN40 2-1/2"~12" PN16
- 工作温度 W.T.: 425°C
- 升杆式/明杆 Rising stem
- 设计标准 Design: GB/T12235
- 法兰标准 Flange dimension: JB/T79-1994, GB/T9113.3
- 检验 & 测试 Inspection & testing: GB/T 12235

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL
1	阀体 BODY	WCB+13Cr CF8 CF8M
2	阀瓣 DISC	WCB+13Cr CF8 CF8M
3	阀杆 STEM	20Cr13 304 316
4	OPEN RING	45 304 316
5	DISC NUT	35 304 316
6	THRUST WASHER	Q235A 304 316
7	垫片 GASKET	PTFE/304+GRAPHITE
8	阀盖 BONNET	WCB CF8 CF8M
9	螺栓 BOLT	35CrMo 304 304
10	螺母 NUT	45 304 304
11	填料 PACKING	PTFE/FLEXIBLE GRAPHITE
12	CLEVIS PIN WITH HEAD	35 304 304
13	SPLIT PIN	Q235A 304 304
14	填料盖 GLAND	WCB CF8 CF8
15	EYE BOLTS	35CrMo 304 304
16	平板 FLAT PAD	65Mn 304 304
17	螺母 NUT	45 304 304
18	阀杆螺母 阀杆螺母 STEM NUT	BRONZE
19	SCREWS	35CrMo 304 304
20	手轮 HANDWHEEL	FCD/WCB
21	平板 FLAT PAD	65Mn 304 304
22	螺母 NUT	45 304 304

尺寸 Dimensions PN16

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	W
15 1/2"	130	15	45	65	95	14	2	4-14	178	120
20 3/4"	150	20	55	75	105	14	2	4-14	182	140
25 1"	160	25	65	85	115	14	2	4-14	201	140
32 1-1/4"	180	32	78	100	135	16	2	4-18	238	160
40 1-1/2"	200	40	85	110	145	16	3	4-18	249	160
50 2"	230	50	100	125	160	16	3	4-18	263	200
65 2-1/2"	290	65	120	145	180	18	3	4-18	312	200
80 3"	310	80	135	160	195	20	3	8-18	336	250
100 4"	350	100	155	180	215	20	3	8-18	388	300
125 5"	400	125	185	210	250	22	3	8-18	467	350
150 6"	480	150	210	240	285	22	3	8-22	529	400
200 8"	600	200	265	295	340	24	3	12-22	667	450
250 10"	730	250	320	355	405	26	3	12-26	825	500
300 12"	850	300	375	410	460	28	3	12-26	947	600

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

AMERICAN STANDARD JAPANESE STANDARD FLANGE SWING CHECK VALVE
美标日标法兰旋启式止回阀



特点 Features

- 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: CLASS 150 / 300
- 工作温度 W.T.: 425°C
- 设计标准 Design: API6D/BS1868 / ASME16.34
- 法兰标准 Flange dimension: JIS B2071 / ASME 16.5
- 结构长度 Face to face: JIS B2002 / ASME16.10
- 检验 & 测试 Inspection & testing: JISB2003/API 598

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB+13Cr	CF8	CF8M
2	阀瓣 DISC	WCB+13Cr	CF8	CF8M
3	LAT PAD	65Mn	304	316
4	螺母 NUT	45	304	316
5	SPLIT PIN	Q235A	304	316
6	ARM	WCB	CF8	CF8M
7	PIN	35	304	316
8	垫圈 WASHER	PTFE		
9	螺栓 BOLT	35CrMo	304	304
10	垫片 GASKET	PTFE/304+GRAPHITE		
11	阀盖 BONNET	WCB	CF8	CF8M
12	螺栓 BOLT	35CrMo	304	304
13	螺母 NUT	45	304	304

尺寸 Dimensions CLASS 150

Nominal Diameter	L	d	D2	D1	D	b	f	n-Φd1	H
15	108	15	35	60.3	90	8	2	4-16	55
20	117	20	43	70	100	8.9	2	4-16	57
25	127	25	51	79.4	110	9.6	2	4-16	63
32	140	32	63.5	88.9	115	11.2	2	4-16	68
40	165	40	73	98.4	125	12.7	2	4-16	77
50	203	50	92	120.7	150	14.3	2	4-19	98
65	216	65	105	139.7	180	15.9	2	4-19	112
80	241	80	127	152.4	190	17.5	2	4-19	125
100	292	100	157	190.5	230	22.3	2	8-19	163
125	330	125	185	216	255	22.3	2	8-22	178
150	356	150	216	241.3	280	23.9	2	8-22	205
200	495	200	270	298.5	345	27	2	8-22	236
250	622	250	324	362	405	28.6	2	12-25	299
300	698	300	381	431.8	485	30.2	2	12-25	330

尺寸 Dimensions 10K

Nominal Diameter	L	d	D2	D1	D	b	f	n-Φd1	H
15	108	15	51	70	95	12	1	4-15	55
20	117	20	56	75	100	14	1	4-15	57
25	127	25	67	90	125	14	1	4-19	63
32	140	32	76	100	135	16	2	4-19	68
40	165	40	81	105	140	16	2	4-19	77
50	203	50	96	120	155	16	2	4-19	98
65	216	65	116	140	175	18	2	4-19	112
80	241	80	126	150	185	18	2	8-19	125
100	292	100	151	175	210	18	2	8-19	163
125	330	125	182	210	250	20	2	8-23	178
150	356	150	212	240	280	22	2	8-23	205
200	495	200	262	290	330	22	2	12-23	236
250	622	250	324	355	400	24	2	12-25	299
300	698	300	368	400	445	24	3	16-25	330

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

NATIONAL STANDARD FLANGE SWING CHECK VALVE
国标法兰旋启式止回阀



特点 Features

- 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: PN16/40
- 工作温度 W.T.: 425°C
- 设计标准 Design: GB / T 12236
- 法兰标准 Flange dimension: JB / T 79.1
- 结构长度 Face to face: GB/T 12236
- 检验 & 测试 Inspection & testing: GB / T 13927, JB / T 9092

材料表 Material List


序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB+13Cr	CF8	CF8M
2	阀瓣 DISC	WCB+13Cr	CF8	CF8M
3	LAT PAD	65Mn	304	316
4	螺母 NUT	45	304	316
5	SPLIT PIN	Q235A	304	316
6	ARM	WCB	CF8	CF8M
7	PIN	35	304	316
8	垫圈 WASHER	PTFE		
9	螺栓 BOLT	35CrMo	304	304
10	垫片 GASKET	PTFE/304+GRAPHITE		
11	阀盖 BONNET	WCB	CF8	CF8M
12	螺栓 BOLT	35CrMo	304	304
13	螺母 NUT	45	304	304

尺寸 Dimensions PN16

Nominal Diameter	L	d	D2	D1	D	b	f	n-Φd1	H
15	130	15	45	65	95	14	2	4-14	55
20	150	20	55	75	105	14	2	4-14	57
25	160	25	65	85	115	14	2	4-14	63
32	180	32	78	100	135	16	2	4-18	68
40	200	40	85	110	145	16	3	4-18	77
50	230	50	100	125	160	16	3	4-18	98
65	290	65	120	145	180	18	3	4-18	112
80	310	80	135	160	195	20	3	8-18	125
100	350	100	155	180	215	20	3	8-18	163
125	400	125	185	210	250	22	3	8-18	178
150	480	150	210	240	285	22	3	8-22	205
200	600	200	265	295	340	24	3	12-22	236
250	750	250	320	355	405	26	3	12-26	299
300	850	300	375	410	460	28	3	12-26	330

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

FLANGE LIFT CHECK VALVE
法兰升降式止回阀

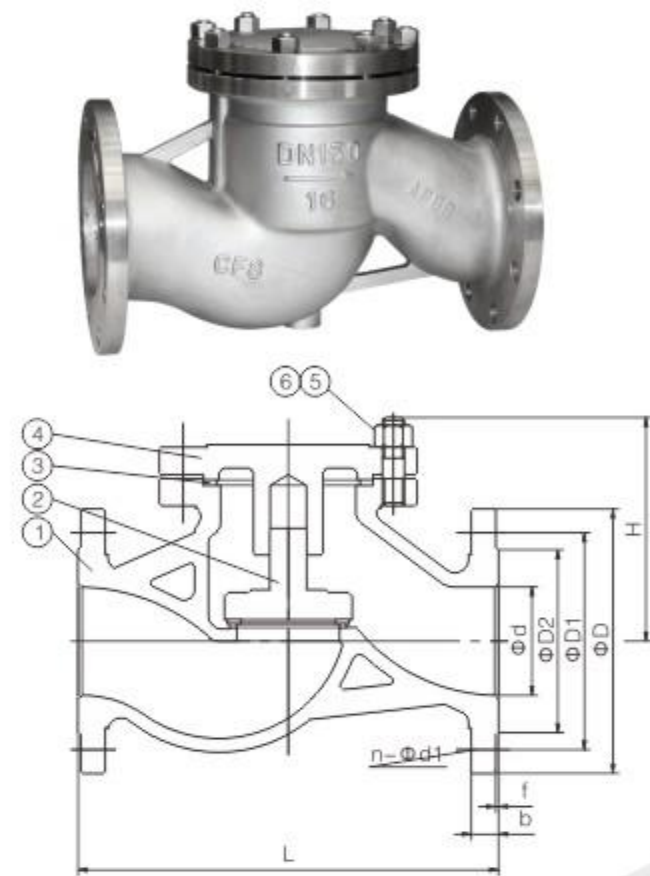

特点 Features

- 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: PN16 CLASS 150 10K
- 工作温度 W.T.: -20°C~180°C

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB+13Cr	CF8	CF8M
2	阀瓣 DISC	WCB+13Cr	CF8	CF8M
3	垫片 GASKET	PTFE/304+GRAPHITE		
4	阀盖 BONNET	WCB	CF8	CF8M
5	螺栓 BOLT	35CrMo	304	304
6	螺母 NUT	45	304	304

尺寸 Dimensions PN16

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H
15	130	15	45	65	95	14	2	4-14	65
20	150	20	55	75	105	14	2	4-14	68
25	160	25	65	85	115	14	2	4-14	73
32	180	32	78	100	135	16	2	4-18	78
40	200	40	85	110	145	16	3	4-18	85
50	230	50	100	125	160	16	3	4-18	103
65	290	65	120	145	180	18	3	4-18	117
80	310	80	135	160	195	20	3	8-18	132
100	350	100	155	180	215	20	3	8-18	147
125	400	125	185	210	250	22	3	8-18	162
150	480	150	210	240	285	22	3	8-22	188
200	600	200	265	295	340	24	3	12-22	222
250	750	250	320	355	405	26	3	12-26	265
300	850	300	375	410	460	28	3	12-26	316

尺寸 Dimensions CLASS 150

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H
15	130	15	35	60.3	90	12	2	4-16	65
20	150	20	43	70	100	12.5	2	4-16	68
25	160	25	51	79.4	110	12.5	2	4-16	73
32	180	32	63.5	88.9	115	13.2	2	4-16	78
40	200	40	73	98.4	125	14.7	2	4-16	85
50	230	50	92	120.7	150	16.3	2	4-19	103
65	290	65	105	139.7	180	17.9	2	4-19	117
80	310	80	127	152.4	190	19.5	2	4-19	132
100	350	100	157	190.5	230	24.3	2	8-19	147
125	400	125	185	216	255	24.3	2	8-22	162
150	480	150	216	241.3	280	25.9	2	8-22	188
200	600	200	270	298.5	345	29	2	8-22	222
250	750	250	324	362	405	30.6	2	12-25	265
300	850	300	381	431.8	485	32.2	2	12-25	316


尺寸 Dimensions 10K

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H
15	130	15	51	70	95	12	1	4-15	65
20	150	20	56	75	100	14	1	4-15	68
25	160	25	67	90	125	14	1	4-19	73
32	180	32	76	100	135	16	2	4-19	78
40	200	40	81	105	140	16	2	4-19	85
50	230	50	96	120	155	16	2	4-19	103
65	290	65	116	140	175	18	2	4-19	117
80	310	80	126	150	185	18	2	8-19	132
100	350	100	151	175	210	18	2	8-19	147
125	400	125	182	210	250	20	2	8-23	162
150	480	150	212	240	280	22	2	8-23	188
200	600	200	262	290	330	22	2	12-23	222
250	750	250	324	355	400	24	2	12-25	265
300	850	300	368	400	445	24	3	16-25	316

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

FLANGE FILTER
法兰过滤器

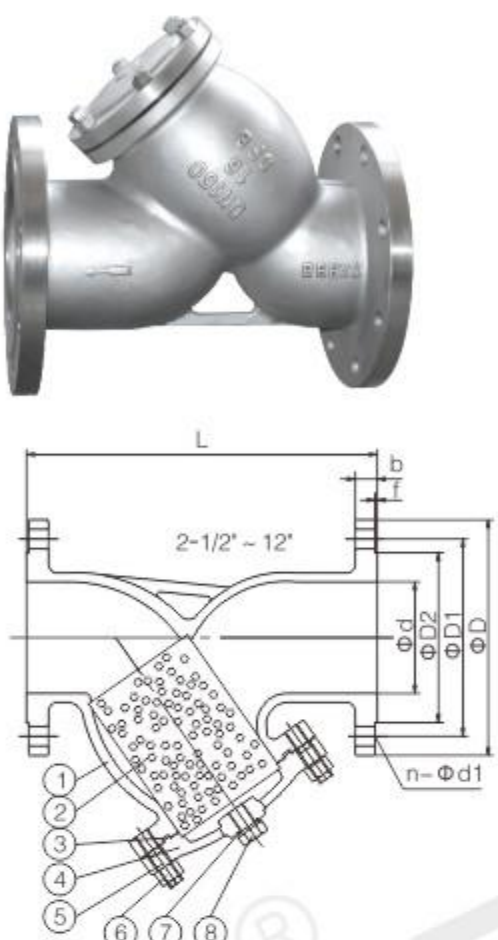

特点 Features

- 1/2"~12" (DN15~DN300)
- 工作压力 W.P.: PN16 CLASS 150 10K
- 工作温度 W.T.: 425°C

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB	CF8	CF8M
2	SCREEN	304	304	316
3	垫片 GASKET	PTFE		
4	阀盖 BONNET	WCB	CF8	CF8M
5	螺栓 BOLT	304		
6	螺母 NUT	304		
7	垫片 GASKET	PTFE		
8	PLUG	304	304	316

尺寸 Dimensions PN16

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1
15	130	15	45	65	95	14	2	4-14
20	150	20	55	75	105	14	2	4-14
25	160	25	65	85	115	14	2	4-14
32	180	32	78	100	135	16	2	4-18
40	200	40	85	110	145	16	3	4-18
50	230	50	100	125	160	16	3	4-18
65	290	65	120	145	180	18	3	4-18
80	310	80	135	160	195	20	3	8-18
100	350	100	155	180	215	20	3	8-18
125	400	125	185	210	245	22	3	8-18
150	480	150	210	240	280	24	3	8-23
200	600	200	265	295	335	26	3	12-23
250	750	250	320	355	405	26	3	12-26
300	850	300	375	410	460	28	3	12-26

尺寸 Dimensions CLASS 150

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1
15	120	15	35	60.3	90	12	2	4-16
20	140	20	43	70	100	12.5	2	4-16
25	150	25	51	79.4	110	12.5	2	4-16
32	170	32	63.5	88.9	115	13.2	2	4-16
40	190	40	73	98.4	125	14.7	2	4-16
50	215	50	92	120.7	150	16.3	2	4-19
65	250	65	105	139.7	180	17.9	2	4-19
80	285	80	127	152.4	190	19.5	2	4-19
100	300	100	157	190.5	230	24.3	2	8-19
125	350	125	185	216	255	24.3	2	8-22
150	380	150	216	241.3	280	25.9	2	8-22
200	480	200	270	298.5	345	29	2	8-22
250	545	250	324	362	405	30.6	2	12-25
300	605	300	381	431.8	485	32.2	2	12-25

尺寸 Dimensions 10K

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1
15	120	15	51	70	95	12	1	4-15
20	140	20	56	75	100	14	1	4-15
25	150	25	67	90	125	14	1	4-19
32	170	32	76	100	135	16	2	4-19
40	190	40	81	105	140	16	2	4-19
50	215	50	96	120	155	16	2	4-19
65	250	65	116	140	175	18	2	4-19
80	285	80	126	150	185	18	2	8-19
100	300	100	151	175	210	18	2	8-19
125	350	125	182	210	250	20	2	8-23
150	380	150	212	240	280	22	2	8-23
200	480	200	262	290	330	22	2	12-23
250	545	250	324	355	400	24	2	12-25
300	605	300	368	400	445	24	3	16-25

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!


D343H WORM GEAR DRIVE FLANGED METAL HARD SEAL BUTTERFLY VALVE
D343H蜗轮传动法兰式金属硬密封蝶阀



YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

D343H WORM GEAR DRIVE FLANGED METAL HARD SEAL BUTTERFLY VALVE
D343H蜗轮传动法兰式金属硬密封蝶阀

D343^H_F-10C.P.R连接尺寸

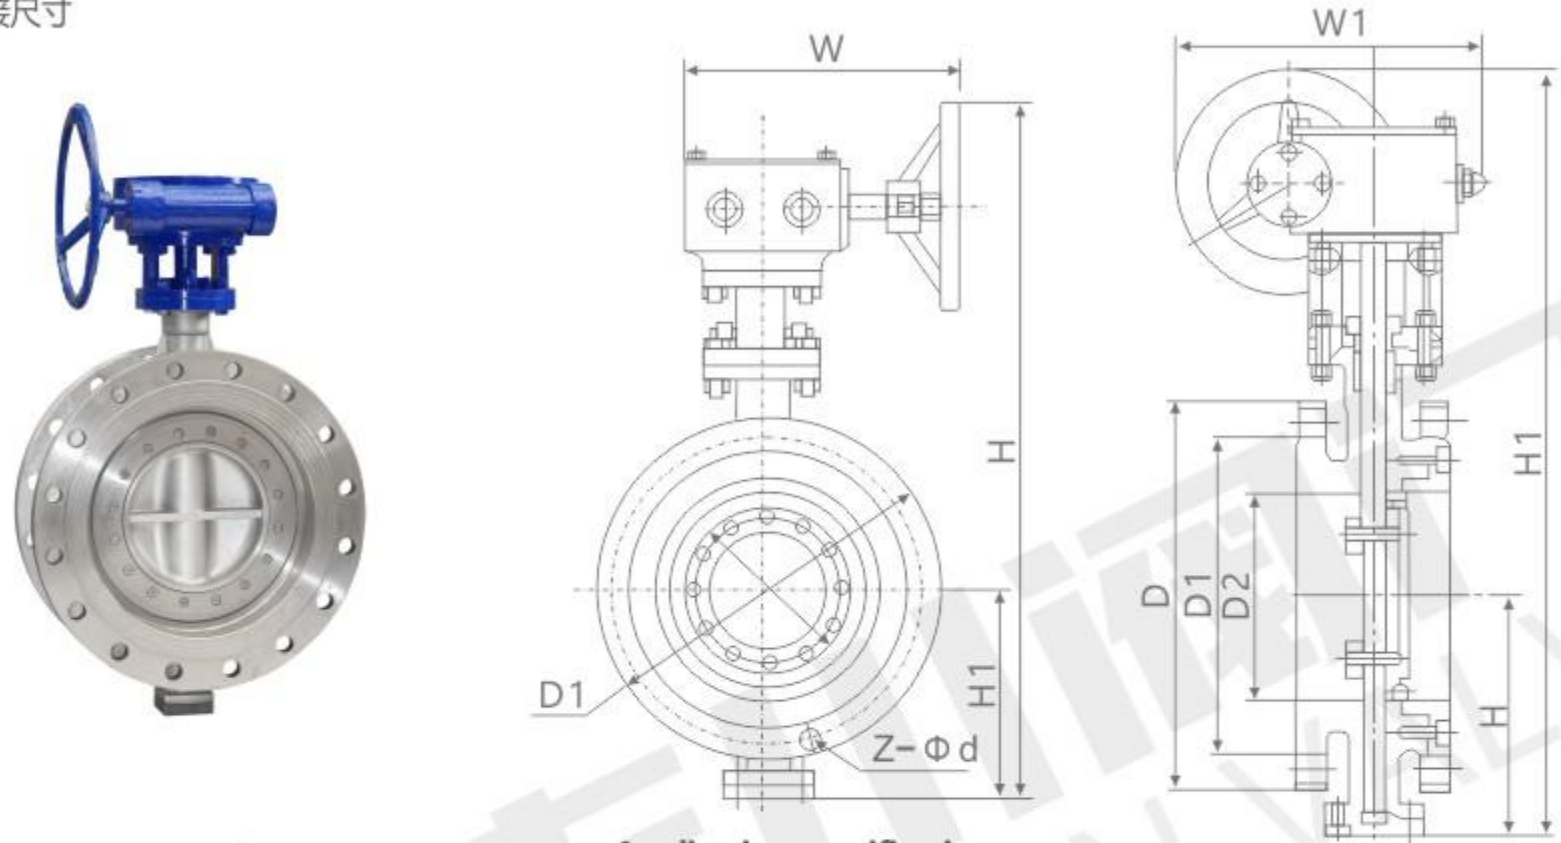

应用规范

设计、制造按GB/T12238-1989
结构长度按GB/T12221-2005
连接法兰：GB/T9113-2000
阀门检查和试验按JB/T9092-1999

Application specification

Design, manufacture: GB/T12238-1989
Length of the structure: GB/T12221-2005
Connecting flange: GB/T9113-2000
Valve inspection and test: JB/T9092-1999

通径DN	L	D	D1	D2	Z-Φd	b	H	H1	W	W1	D0
50	108	165	125	99	4-18	20	360	112	200	200	160
65	112	185	145	118	4-18	20	380	115	200	200	160
80	114	200	160	132	8-18	20	455	120	220	200	160
100	127	220	180	156	8-18	22	490	140	240	200	160
125	140	250	210	184	8-18	22	490	170	260	200	160
150	140	285	240	211	8-22	24	630	180	280	280	240
200	152	340	295	266	8-22	24	690	210	320	280	240
250	165	395	350	319	12-22	26	830	240	360	280	240
300	178	445	400	370	12-22	26	930	290	460	420	310
350	190	505	460	429	16-22	26	1010	320	500	420	310
400	216	565	515	480	16-26	26	1070	350	540	420	310
450	222	615	565	530	20-26	28	1140	380	580	420	310
500	229	670	620	582	20-26	28	1200	410	620	420	310
600	267	780	725	682	20-30	34	1340	470	660	420	310
700	292	895	840	794	24-30	34	1600	550	750	550	400
800	318	1015	950	901	24-33	36	1780	640	800	550	400
900	330	1115	1050	1001	28-33	38	1920	710	850	550	400
1000	410	1230	1160	1112	28-36	38	1960	770	1000	750	500
1200	470	1455	1380	1328	32-39	44	2360	875	1050	750	500
1400	530	1675	1590	1530	36-42	48	2530	970	800	890	600
1600	600	1915	1820	1750	40-48	52	2640	1100	800	890	600
1800	670	2115	2020	1950	44-48	56	2800	1200	830	920	700
2000	760	2325	2230	2150	48-48	60	3100	1290	850	940	700

D343^H_F-16C.P.R连接尺寸

通径DN	L	D	D1	D2	Z-Φd	b	H	H1	W	W1	D0
50	108	165	125	99	4-18	20	360	112	200	200	160
65	112	185	145	118	4-18	20	380	115	200	200	160
80	114	200	160	132	8-18	20	455	120	220	200	160
100	127	220	180	156	8-18	22	490	140	240	200	160
125	140	250	210	184	8-18	22	490	170	260	200	160
150	140	285	240	211	8-22	24	630	180	280	280	240
200	152	340	295	266	12-22	24	690	210	320	280	240
250	165	405	355	319	12-26	26	830	240	360	280	240
300	178	460	410	370	12-26	28	930	290	460	420	310
350	190	520	470	429	16-26	30	1010	320	500	420	310
400	216	580	525	480	16-30	32	1070	350	540	420	310
450	222	640	585	548	20-30	40	1140	380	580	420	310
500	229	715	650	609	20-33	44	1200	410	620	420	310
600	267	840	770	720	20-36	44	1340	470	660	420	310
700	292	910	840	794	24-36	50	1600	550	750	550	400
800	318	1025	950	901	24-39	52	1780	640	800	550	400
900	330	1125	1050	1001	28-39	54	1920	710	850	550	400
1000	410	1255	1170	1112	28-42	56	1960	770	1000	750	500
1200	470	1485	1390	1328	32-48	44	2360	875	1050	750	500
1400	530	1690	1590	1530	36-48	48	2530	970	800	890	600
1600	600	1930	1820	1750	40-56	52	2640	1100	800	890	600

D343^H_F-25C.P.R连接尺寸


通径DN	L	D	D1	D2	Z-Φd	b	H	H1	W	W1	D0
50	108	165	125	99	4-18	20	360	112	200	200	160
65	112	185	145	118	8-18	22	380	115	200	200	160
80	114	200	160	132	8-18	24	455	120	220	200	160
100	127	235	190	156	8-22	24	490	140	240	200	160
125	140	270	220	184	8-26	26	490	170	260	200	160
150	140	300	250	211	8-26	28	630	180	280	280	240
200	152	360	310	274	12-26	30	690	210	320	280	240
250	165	425	370	330	12-30	32	830	240	360	280	240
300	178	485	430	389	16-30	34	930	290	460	420	310
350	190	555	490	448	16-33	38	1010	320	500	420	310
400	216	620	550	503	16-36	40	1070	350	540	420	310
450	222	670	600	548	20-36	46	1140	380	580	420	310
500	229	730	660	609	20-36	48	1200	410	620	420	310
600	267	845	770	720	20-39	58	1340	470	660	420	310
700	292	960	875	820	24-42	50	1600	550	750	550	400
800	318	1085	990	928	24-48	54	1780	640	800	550	400
900	330	1185	1090	1028	28-48	58	1920	710	850	550	400
1000	410	1320	1210	1140	28-55	62	1960	770	1000	750	500

D343^H_F-40C.P.R连接尺寸

通径DN	L	D	D1	D2	D6	Z-Φd	b	H	H1	W	W1	D0
50	150	165	125	99	88	4-18	20	360	112	200	200	160
65	170	185	145	118	110	8-18	22	380	115	200	200	160
80	180	200	160	132	121	8-18	24	455	120	220	200	160
100	190	235	190	156	150	8-22	24	490	140	240	200	160
125	200	270	220	184	176	8-26	26	490	170	260	200	160
150	210	300	250	211	204	8-26	28	630	180	280	280	240
200	230	375	320	284	260	12-30	34	690	210	320	280	240
250	250	450	385	345	313	12-33	38	830	240	360	280	240
300	270	515	450	409	364	16-33	42	930	290	460	420	310
350	290	580	510	465	422	16-36	46	1010	320	500	420	310
400	310	660	585	535	474	16-39	50	1070	350	540	420	310

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

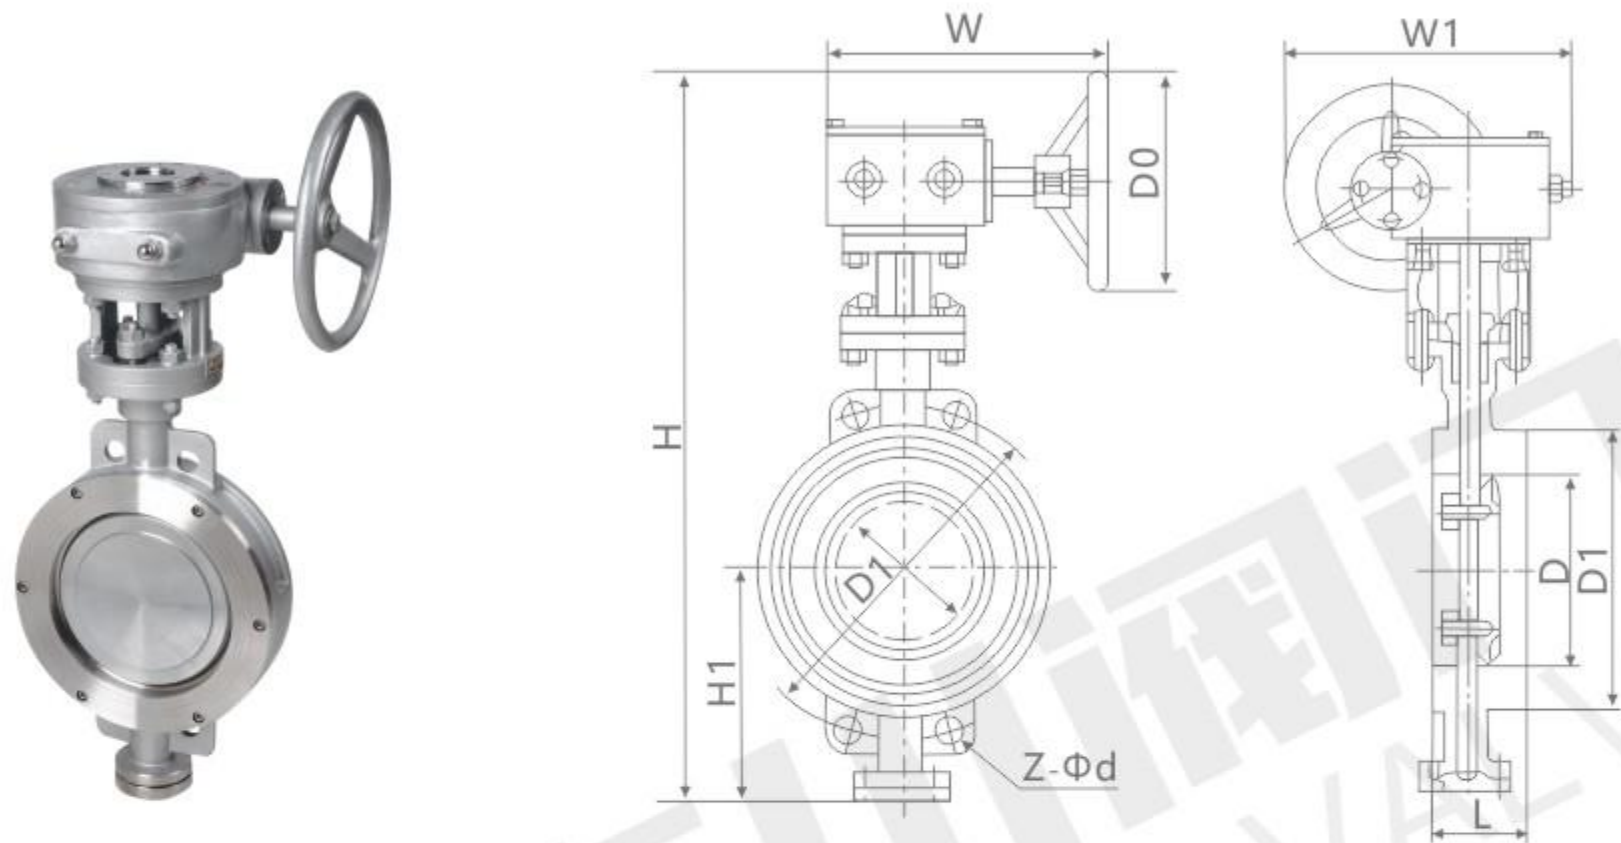

应用规范

设计、制造按GB/T12238-1989

结构长度按GB/T12221-2005

连接法兰：GB/T9113-2000

阀门检查和试验按JB/T9092-1999

Application specification

Design, manufacture: GB/T12238-1989

Length of the structure: GB/T12221-2005

Connecting flange: GB/T9113-2000

Valve inspection and test: JB/T9092-1999

D373^H_F-10C.P.R连接尺寸

通径DN	L	D1	D	Z-Φd	H	H1	W	W1	D0
50	43	125	102	4-18	360	112	200	200	160
65	46	145	122	4-18	380	115	200	200	160
80	49	160	133	8-18	455	120	220	200	160
100	56	180	158	8-18	490	140	240	200	160
125	64	210	184	8-18	490	170	260	200	160
150	70	240	212	8-22	630	180	280	280	240
200	71	295	268	8-22	690	210	320	280	240
250	76	350	320	12-22	830	240	360	280	240
300	83	400	370	12-22	930	290	460	420	310
350	92	460	430	16-22	1010	320	500	420	310
400	102	515	482	16-26	1070	350	540	420	310
450	114	565	532	20-26	1140	380	580	420	310
500	127	620	585	20-26	1200	410	620	420	310
600	154	725	685	20-30	1340	470	660	420	310
700	165	840	800	24-30	1600	550	750	550	400
800	190	950	905	24-33	1780	640	800	550	400
900	203	1050	1005	28-33	1920	710	850	550	400
1000	216	1160	1110	28-36	1960	770	1000	750	500
1200	254	1380	1330	32-39	2360	875	1050	750	500
1400	279	1590	1530	36-42	2530	970	800	890	-
1600	318	1820	1750	40-48	2640	1100	800	890	-
1800	356	2020	1950	44-48	2800	1200	830	920	-
2000	406	2230	2150	48-48	3100	1290	850	940	-

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!

YOU NEED BODY
WHOLE-HEARTED SERVICE
体你所需 用心服务

D373^H_F-16C.P.R连接尺寸

通径DN	L	D1	D	Z-Φd	H	H1	W	W1	D0
50	43	125	102	4-18	360	112	200	200	160
65	46	145	122	4-18	380	115	200	200	160
80	49	160	133	8-18	455	120	220	200	160
100	56	180	158	8-18	490	140	240	200	160
125	64	210	184	8-18	490	170	260	200	160
150	70	240	212	8-22	630	180	280	280	240
200	71	295	268	12-22	690	210	320	280	240
250	76	355	320	12-26	830	240	360	280	240
300	83	410	370	12-26	930	290	460	420	310
350	92	470	430	16-26	1010	320	500	420	310
400	102	525	482	16-30	1070	350	540	420	310
450	114	585	532	20-30	1140	380	580	420	310
500	127	650	585	20-33	1200	410	620	420	310
600	154	770	685	20-36	1340	470	660	420	310
700	165	840	800	24-36	1600	550	750	550	400
800	190	950	905	24-39	1780	640	800	550	400
900	203	1050	1005	28-39	1920	710	850	550	400
1000	216	1170	1110	28-42	1960	770	1000	750	500
1200	254	1390	1330	32-48	2360	875	1050	750	500
1400	279	1590	1530	36-48	2530	970	800	890	-
1600	318	1820	1750	40-56	2640	1100	800	890	-

D373^H_F-25C.P.R连接尺寸

通径DN	L	D1	D	Z-Φd	H	H1	W	W1	D0
50	43	125	102	4-18	360	112	200	200	160
65	46	145	122	8-18	380	115	200	200	160
80	49	160	133	8-18	455	120	220	200	160
100	56	190	158	8-22	490	140	240	200	160
125	64	220	184	8-26	490	170	260	200	160
150	70	250	212	8-26	630	180	280	280	240
200	71	310	268	12-26	690	210	320	280	240
250	76	370	330	12-30	830	240	360	280	240
300	83	430	390	16-30	930	290	460	420	310
350	92	490	450	16-33	1010	320	500	420	310
400	102	550	505	16-36	1070	350	540	420	310
450	114	600	555	20-36	1140	380	580	420	310
500	127	660	610	20-36	1200	410	620	420	310
600	154	770	720	20-39	1340	470	660	420	310
700	165	875	820	24-42	1600	550	750	550	400
800	190	990	930	24-48	1780	640	800	550	400
900	203	1090	1030	28-48	1920	710	850	550	400
1000	216	1210	1140	28-56	1960	770	1000	750	500

D373^H_F-40C.P.R连接尺寸

通径DN	L	D1	D	Z-Φd	H	H1	W	W1	D0
50	43	125	102	4-18	360	112	200	200	160
65	46	145	122	8-18	380	115	200	200	160
80	64	160	133	8-18	455	120	220	200	160
100	64	190	158	8-22	490	140	280	200	160
125	70	220	184	8-26	490	170	280	200	160
150	76	250	212	8-26	630	180	280	280	240
200	89	320	268	12-30	690	210	280	280	240
250	114	385	330	12-33	825	240	280	280	240
300	114	450	390	16-33	908	290	450	420	310
350	127	510	450	16-36	960	320	450	420	310
400	140	585	505	16-39	1330	350	540	437	310

注：所有产品尺寸仅供参考，具体以实物为准！
Note: all product dimensions are for reference only, specific in kind prevail!